

# ACFD APPLICATIONS TO STORE SEPARATION – STATUS REPORT

**A. Cenko<sup>†</sup>, NAVAIR Chair and Visiting Professor  
United States Naval Academy, Annapolis, MD  
Major M. Lutton<sup>&</sup>, ACFD Program Manager  
Air Force Seek Eagle Office, Eglin AFB, Fla.**

## INTRODUCTION

During the past decade, the Navy has considerably improved its capabilities in aircraft/weapon integration. In 1989 it took more than 400 hours of wind tunnel testing, which cost 1,500,000, and 20 flights<sup>1</sup> to clear the JSOW from the F-18 to Mach 0.95. This year the MK-83 JDAM was cleared after only 60 hours of wind tunnel testing and five flights to the full F-18 aircraft envelope of Mach 1.3. This reduction occurred because the Navy not only learned to test smarter, but also developed an integrated approach<sup>2</sup> to Modeling & Simulation (M&S), wind tunnel and flight testing which allowed lessons learned on previous programs to be applied to new ones. However, the present approach still requires a fairly large commitment of time and financial resources to accomplish the mission.

The present approach has optimized the use of available resources; any further gains will have to come not by improving existing techniques, but by bringing new resources into the process.

Several years ago the Office of the Secretary of Defense (OSD), under the Central Test and Evaluation Investment Program (CTEIP) funded a tri-service research project termed Applied Computational Fluid Dynamics (ACFD) for store separation. This project is meant to provide analysis tools that effectively use Computational Fluid Dynamics (CFD) for store certification analysis. ACFD will provide the needed tools that will reduce DOD dependence on wind tunnel and flight-testing.

ACFD is not intended to replace the wind tunnel in the near future; rather it will be used to determine the critical regions of the flight envelope to help structure the wind tunnel test, and to explain any wind tunnel anomalies and help structure the flight test program. The objective of the program is to provide upgraded analysis tools that will support store certification requirements at less cost and in less time.

## NOMENCLATURE

BL: Aircraft Buttline, positive outboard, in.  
 $C_l$ : Rolling moment coefficient, rt wing down  
 $C_m$ : Pitching moment coefficient, positive up  
 $C_N$ : Normal Force coefficient, up  
 $C_n$ : Yawing moment coefficient, nose right  
 $C_Y$ : Side force coefficient, right  
FS: Aircraft Fuselage Station, positive aft, in.  
l.e. F-18 Wing leading edge flap  
t.e. F-18 Wing trailing edge flap  
M: Mach number  
P: Store roll rate, positive rt wing down  
Q: Store pitch rate, positive nose up  
R: Store yaw rate, positive nose right  
PHI: Store roll angle, positive rt wing down, deg.  
PSI: Store yaw angle, positive nose right, deg.  
THE: Store pitch angle, positive nose up, deg.  
WL: Aircraft Waterline, positive up, in.  
Z: Store C.G. location, positive down, ft.  
 $\alpha$ : Angle of attack, deg.  
 $\epsilon$ : Upwash angle, positive up, deg.  
 $\sigma$ : Sidewash angle, positive outboard, deg.  
Note: all wind tunnel data shown are right wing, flight test left (negative PSI, PHI, Y)

<sup>†</sup> ACFD Navy Technical Lead, Associate Fellow, AIAA & ACFD Program Manager, Senior Member, AIAA



## ACFD CHALLENGES

Over the past several years there have been several organized efforts to validate, demonstrate and accelerate the insertion of CFD methods into the store certification process for external stores carriage and release. Several significant efforts have been documented in AIAA conference proceedings. The first of these was the Wing/Pylon/Finned-Store which occurred in Hilton Head, SC in the summer of 1992. An extensive set of wind tunnel store carriage and separation data for CFD code validation were made available for a generic wing and store geometry<sup>3</sup>. Although Euler<sup>4,5</sup> and thin layer Navier Stokes<sup>6</sup> (TNS) solutions were in good agreement with these test data, solution times on the order of 5 days<sup>7</sup> on the Cray YMP made such tools impractical for everyday use. Madson later demonstrated<sup>8</sup> that the TranAir full-potential code could give results of similar quality in a fraction of the time required for the higher order codes, as may be seen in Figure 1 and Figure 2.

### ACFD CHALLENGE I

The first ACFD sponsored conference was the F-16/Generic Finned Store<sup>9-14</sup> which occurred in New Orleans in the summer of 1996 (ACFD Challenge I). At the end of the meeting, the ACFD tri-service technical leads evaluated the CFD tools that were used to predict the F-16 Generic store carriage loads. The evaluation concentrated on the following characteristics:

1. Time required to obtain a solution, which included the time required to convert the geometry into a form compatible with the code's pre-processor, the time required to obtain a surface and volume grid, and the time required to ensure that the solution obtained was properly converged.
2. The accuracy of the solution.
3. Code efficiency or time required to obtain a meaningful minimum number of independent

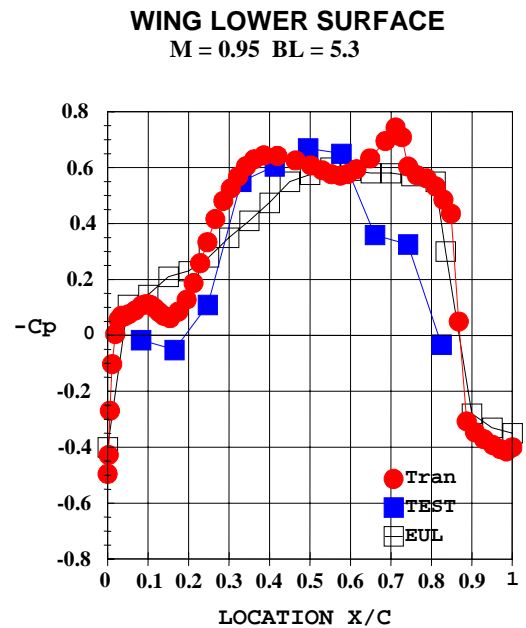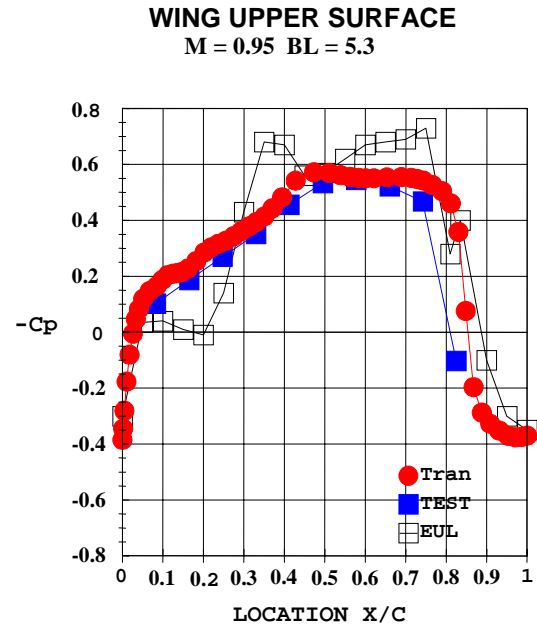

solutions; one solution, at one Mach number and angle of attack is useless for determining a store's trajectory. This time is determined both

by the difficulty in generating a new geometry and the running time for each case.

4. Potential for production use: the overall goal of the ACFD project.

The following CFD codes were evaluated for the project:

SPLITFLOW<sup>9</sup> by Lockheed.

TranAir<sup>10</sup> by NAWCAD

USM3D<sup>12</sup> by NAWCAD

OVERFLOW<sup>13</sup> by NASA Johnson

STORESIM<sup>14</sup> by Wright Labs

Since STORESIM never obtained a valid solution, it was dropped from the study.

I. The time required to obtain a solution, according to the reports submitted at the end of the project, were hard to compare since it could be influenced to a large extent by the past experience of the code's user. The NAWCAD efforts were purposefully conducted by individuals with no prior experience with the particular codes used, while the other efforts were conducted by individuals with varying degrees of prior experience with the tools. However, based on the information available, TranAir took about two weeks to obtain a solution, SPLITFLOW and USM3D took about a month for a solution, while OVERFLOW took about three months for one solution. On that basis the TranAir code was judged the best.

II. The accuracy of the solution was also hard to determine, since SPLITFLOW had 24 independent solutions, some of which were excellent while others were terrible, while OVERFLOW had only one. However, based on the one common solution for the two codes, it appears that the OVERFLOW solution was slightly better in terms of the pressure comparisons. The USM3D and TranAir solutions were comparable to each other, but not as good as the OVERFLOW comparison.

III. Since SPLITFLOW provided 24 solutions in the four months of the project, TranAir and USM3D provided 8 independent solutions, and OVERFLOW had only one solution, the

SPLITFLOW code was clearly superior in this respect.

IV. For transition potential SPLITFLOW appears to be clearly superior to all the others. TranAir, which gives answers of equivalent accuracy with considerably less set up time seemed slightly better than USM3D. OVERFLOW, as the Navy had previously determined, is too cumbersome to provide meaningful results in the time required for store separation projects.

Many important lessons were learned; however, the experimental test case did not include flight test data ("real" store trajectories). Because of this limitation, store certification engineers continued to express skepticism towards the accuracy of CFD methods. Also, the CFD community raised concerns about the credibility of portions of the wind tunnel test data, criticizing scale, model support interference, and wall effects. Therefore, there was a desire within the ACFD<sup>15</sup> program to reconcile these issues by conducting additional analysis by using a data set that included both wind tunnel and flight test data.

## ACFD CHALLENGE II

### Selection of Test Case

Large sets of wind tunnel and flight test data existed for the F/A-18C JDAM configuration, Figure 3. During the flight test phase, both photogrametrics and telemetry were used to track the position of the store during releases. Out of these tests, two release conditions were selected for this CFD Challenge. The basis for these two cases included the following considerations: 1) matching aircraft and store geometry in both wind tunnel and flight tests, 2) correlation between wind tunnel data and flight test data, 3) possession of both high transonic and low supersonic cases with interesting miss distance time histories, 4) ability to publicly release the wind tunnel and flight test data to an international audience.

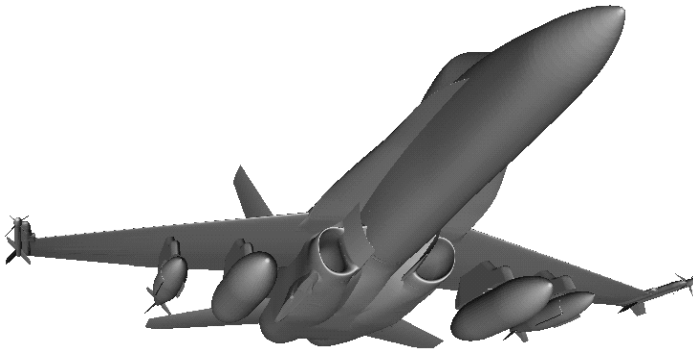


FIGURE 3 F/A-18C/JDAM Test Case

**TEST CASE PARAMETERS**

The test cases selected were  $M = 0.962$  at 6,382 ft. (flight 13) and  $M = 1.05$  at 10,832 ft. (flight 14). Both cases were for the aircraft in a 45-degree dive.

For these two test cases, the configuration geometry for the wind tunnel and flight test is shown above. The JDAM is mounted on the outboard pylon, with the 330-gallon fuel tank on the inboard pylon. The SUU-65 BRU-32A/A ejector rack provided a nominal peak force of 7,000# for both fwd and aft cartridges. As may be seen in Figure 4, an Euler prediction of the Mach number distribution at  $M = 0.962$  indicates strong transonic interference effects.

**FLIGHT TEST RESULTS**

Both Captive Trajectory System (CTS) grid data, and store aerodynamic force and moment data measured on the wing pylon were available for this aircraft configuration. These data were input into a six-degree-of-freedom trajectory code before the flight tests were performed. Parametric variations on flight conditions and store aerodynamic forces were performed to ensure that the flight test could be safely accomplished. After the flight tests were completed, the trajectory simulations were again performed, with the actual flight conditions used to try to match the flight test results. These predicted trajectories were used as the metric for the CFD Challenge II,

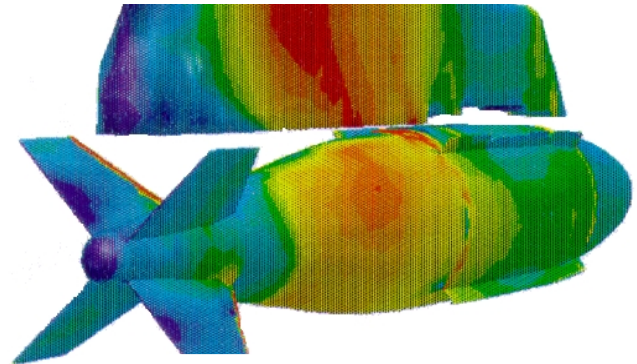


FIGURE 4 JDAM MK-84

and were not given to the participants until just prior to the meeting

**TEST FLIGHT #13**

Flight test #13 was conducted on July 10, 1996. The store was released in a 43 degree dive at 6,382 ft. at  $M = 0.962$ . The telemetry and photographic data were not in good agreement with each other for the vertical displacement. Since inertial effects (store mass and ejector force) largely drive the vertical displacement, the relative Z displacement is usually the easiest to predict. The discrepancy in Z was attributed to

**JDAM FLIGHT 13**

**$M = 0.962$  6382 FT 43 DIVE**

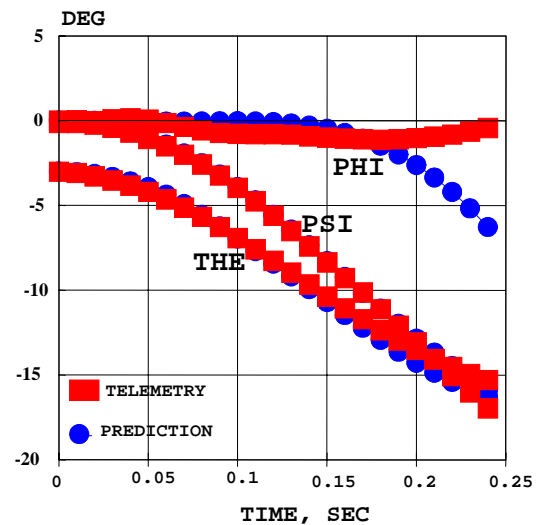


FIGURE 5

the effects of aircraft motion caused by store re-release.

As may be seen in Figure 5, the predicted pitch and yaw attitudes at  $M = 0.962$  were in excellent agreement with the flight test results. The roll attitude was not well predicted.

However, roll attitude, which is the hardest to predict, fortunately has a minimal impact on the trajectory. The photogrammetric results are not shown, since they were considered to be less accurate than the telemetry data.

**TEST FLIGHT #14**

Flight test #14 was conducted on August 29, 1996. The store was released in a 44 degree dive at 10,832 ft. at  $M = 1.055$ . The telemetry and photogrammetric results for the displacement again showed a large discrepancy in Z.

The predictions using the wind tunnel test data were again in excellent agreement with the flight test data, Figure 6.

**MISS DISTANCES**

The most important parameter for safe store separation is the ability to accurately predict the

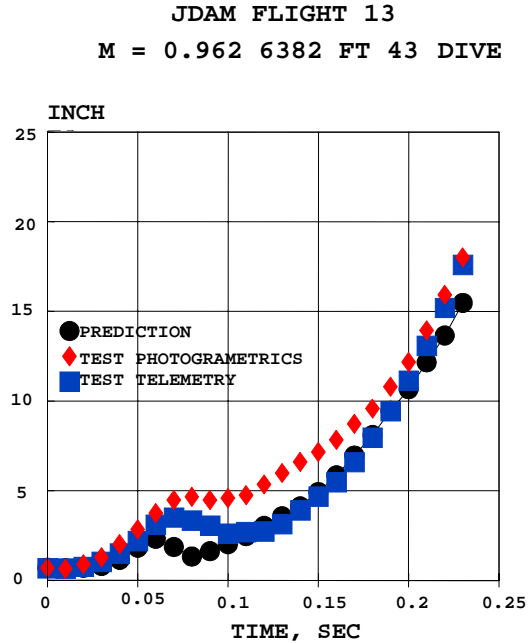


FIGURE 7 JDAM MISS DISTANCE

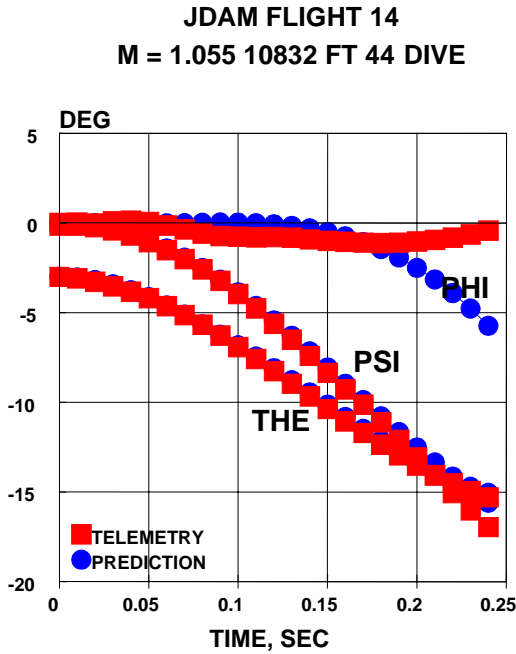


FIGURE 6

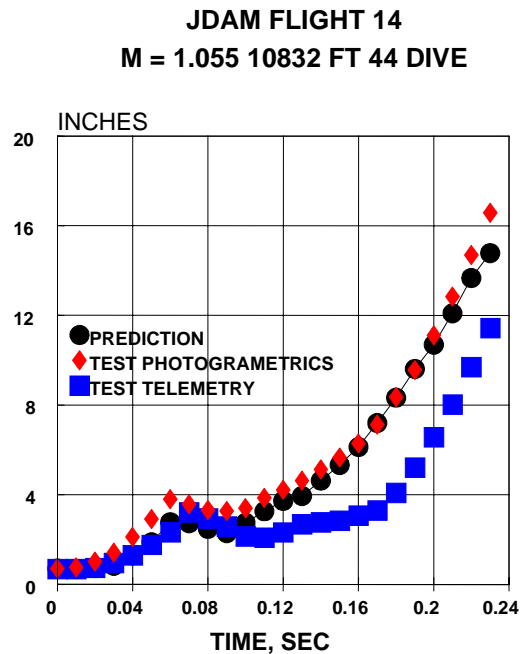


FIGURE 8 JDAM MISS DISTANCE

store miss distance, which is the smallest distance between any part of the store and aircraft during the early part of the trajectory. The trajectory simulation used the force measured for ejection from the F-18 centerline to compensate for aircraft motion.

As may be seen in Figures 7 and 8, the miss distance predictions were in excellent agreement with the test data. The disagreement between the photogrammetric and telemetry predicted miss distance is attributed to the fact that the telemetry could not take aircraft motion into account.

## ACFD CHALLENGE II PAPERS

### General

Each participant was requested to include in his or her paper:

- 1) a description of the CFD and trajectory integration methods used to produce the estimates of the trajectory;
- 2) a description of the methods and resources required to produce the computational grid;
- 3) estimates of carriage loads, the position and attitude of the store throughout the computed trajectories and an estimate of the miss distance versus time; and
- 4) metrics of the CFD process used, including convergence rate, man-hours and time required for grid generation, computer resources used and an estimate of the expertise of personnel required to replicate the results.

Eight papers by Cenko<sup>16</sup>, Hall<sup>17</sup>, Tomaro<sup>18</sup>, Woodson<sup>19</sup>, Welterlen<sup>20</sup>, McGroy<sup>21</sup>, Fairlie<sup>22</sup>, and Benmeddour<sup>23</sup> were submitted for ACFD Challenge II. The meeting was held at the AIAA Annual meeting in Reno Nevada on January 12<sup>th</sup>, 1999. Due to the interest in the Challenge the timing of the session and the venue were changed to enable seating for around 200 people; despite this, the room was filled to capacity with over 50 people having to stand in the back for four hours.

The first paper<sup>16</sup> described the wind tunnel and flight test results, while the other seven described the application of seven different CFD codes to the problem. Two of the papers<sup>17,21</sup> were not ready in time to be included in the meeting proceedings, but all eight papers were either presented at the meeting, or the results were provided at a later date.

### ACFD Challenge II Overview paper

Cenko outlined the background to the Challenge and the sources of the data used. The wind tunnel data consisted of both CTS grid and carriage force and moment data measured on the wing pylon, conducted in the CALSPAN 8-ft. transonic wind tunnel. The grid and carriage data were 6%, while the freestream data at both 6% and 22% were available. As was seen in Figures 5-8, the wind tunnel data were in excellent agreement with the flight test results.

### CFD Research Corporation.

L. Hall<sup>11</sup> presented the results of the CFD research code for the F-18/JDAM configuration. These results were significantly different from the other seven codes presented, since the trajectory calculations were run in a time dependent mode. At the time of the meeting, the trajectory had run for only .05 seconds; however, the predictions shown were in good agreement with the test data. One drawback of using time dependent (as opposed to steady state) trajectory calculations is that it takes a very long time to get one solution, and, if any of the parameters change, another solution would take just as long.

### Air Force Wright Research Lab

Tomaro presented the F/A-18C/JDAM carriage loads and trajectory analyses conducted by AFRL/VAAC. The study included the use of computational aerodynamic (CFD) and 6DOF rigid-body, trajectory generation techniques. The two methods were not coupled into a single simulation package: the CFD method simply

provided the aerodynamic loads database to the trajectory generator which was run independently in a carriage-loads decay manner. The CFD portion of these analyses used the AFRL/VAAC 'Cobalt' flow solver.

For the F/A-18C/JDAM carriage cases, several tetrahedral grids were produced with the NASA GridTool/VGRIDns unstructured mesh generation system. The primary grid used in subsequent carriage loads analyses consisted of 6.62 million cells (half-model for symmetry) with viscous boundary layers (approx. 4 million cells) about all components of the F/A-18C and JDAM. About one-month of calendar time was required to generate an 'appropriate' mesh, i.e. no negative volumes, crossed faces, etc. Subsequent Cobalt solutions required about 10.1 GBytes of main memory and the following timings:

M = 0.962	M = 1.055
50 nodes (CPU's) IBM SP2	32 nodes IBM SP2
17.69 hours wall-clock	26.87 hours wall-clock
17.22 hours CPU/node	6.27 hours CPU/node
(861 total CPU hours)	(841 total CPU hours)

Isolated freestream JDAM viscous grid generation and flow solutions (alpha and beta sweeps) required less than 3 weeks turnaround for both Mach numbers. Thus, within two months calendar time, the CFD portion of the Challenge was completed.

After the carriage and isolated, freestream JDAM aerodynamics were provided by Cobalt, trajectories were generated using the NAWCAD NAVSEP<sup>2</sup> program. The carriage-loads decay method was used to account for mutual interference effects between the F/A-18C and JDAM. In addition to aerodynamic forces and moments, NAVSEP requires the JDAM inertial properties, damping coefficients, ejector-model characteristics, and then it calculates trajectories in a matter of seconds on any computer platform.

The predictions for the pitch and yaw motion of the store for the  $M = 0.962$  and  $M = 1.05$  were in excellent agreement with the test data, although the pitch attitude was somewhat over-predicted. This implies that the predicted

carriage pitching moment was larger than that in flight. The roll motion was not well predicted. However, since rolling motion has traditionally been the hardest part of the trajectory to predict, and generally has little influence on store miss distances, the lack of rolling motion correlation is of small consequence.

#### Naval Air Warfare Center.

Woodson<sup>19</sup> presented comparisons for SPLITFLOW, USM3D, and PUMA, an unstructured, viscous code developed at NAWCAD.

Only viscous-store results were computed using the USM3D code. The code for both cases was run for 2000 iterations using a CFL of 0.1 initially ramping up to 100 over the first 500 iterations and then continued at 100 for the remaining 1500 iterations. The solutions converged to a steady state value in approximately 500 iterations with the residual reduced about three orders of magnitude. The solutions were run on a Cray C90 and required 315 MW of memory and a total of 48.44 hours of CPU time for case 1 and 57.46 hours for case 2. Multitasking was employed using ten processors for a wall clock time of approximately six hours for case 1 and eight hours for case 2 (average concurrent CPUs = 7.5 and 6.96, respectively).

Two solution approaches using SPLITFLOW were conducted: (1) inviscid, and (2) viscous around the JDAM store. By assigning different material numbers to the various components of the configuration (i.e. wings, pylons, stores, etc.) different boundary conditions may be applied so that the prismatic grids may be generated only on those parts of the geometry where viscous effects are anticipated to be important and neglected elsewhere. Both cases were run for 2000 iterations using a CFL number of 1.0 and a turbulent CFL number of 0.1. The solutions were run on a Cray C90 requiring 256 MW of memory and a total of 58.56 CPU hours for case 1 and 81.29 hours for case 2. Multitasking was employed using four processors for a wall clock

time of approximately 34 and 48 hours (average concurrent CPUs = 1.75 and 1.7, respectively). The longer run time for case 2 was caused by sliver cell problems aft of the shock at the pylon trailing edge so a smaller global cell size was employed which resulted in the code reaching its maximum number of cells much sooner than it did for case 1. Both cases achieved about three orders of magnitude reduction of the residuals. The inviscid solutions required about one half the run times of the viscous store results (26.50 and 40.56 CPU hours, respectively).

Both of the PUMA runs were inviscid and were performed using between 32 and 64 nodes of the IBM SP-2. Each run was converged two orders of magnitude using first order spatial accuracy. Then this first order solution was used to initialize the second order runs. Unfortunately, it was possible to converge the second order solution only about 1-2 orders in the residuals.

Although the results presented were impressive and showed good correlation with the test data, the JDAM strakes were not modeled in the analysis. It is not known whether the results obtained were fortuitous, or that the strakes have little impact on the trajectories.

### **Lockheed Martin**

Welterlen<sup>20</sup> presented both viscous and inviscid SPLITFLOW results. The viscous grid required 800,000 Cartesian Cells, and an additional 1,044,207 prismatic cells on the surface. The inviscid solution required approximately 120 CPU hours on a HP 9000 using 8 V-2250 processors. The viscous results required about 250 CPU hours on a Cray J-90.

The predicted carriage loads were in close agreement with the test data; however, the inviscid results matched the carriage loads better than did the viscous. Since the SPLITFLOW code was coupled to a six-degree-of-freedom code that was developed for this purpose, it was not possible to determine whether the relatively poor predicted

trajectories were due to SPLITFLOW or the trajectory code.

### **Aerosoft Inc**

The sixth paper from Aerosoft Inc using the GUST solver package was withdrawn. McGroy later presented results that were similar to the others shown in this paper, but these have not been made available at this time.

### **DSTO Australia**

Fairlie then presented computations<sup>22</sup> using the RAMPANT code supplied by Fluent Inc.

The trajectories followed by the JDAM after its release were simulated using the Defence Science and Technology Organization Release Evaluation Suite (DSTORES). This approach is similar to that used by Tomaro and Woodson.

The initial grid as input to the RAMPANT Solver consisted of just over 1.05 million tetrahedra. A typical RAMPANT run consisted of about 200 iterations with the value of the CFL number set to 0.5, followed by about 300 iterations with CFL set to 1.0. This was generally sufficient to reduce the normalized residuals of continuity, x-, y- and z-momentum and energy by between two and one half and three orders of magnitude compared with their initial values. At this stage, the grid was adapted in regions in which the static pressure gradient exceeded a particular value (initially set to 10% of its maximum value, but varied depending on the number of tetrahedra generated in the new grid) in an attempt to better define shock waves. After adaptation, the grid generally contained somewhat more than 1.25 million tetrahedra. The solution was then iterated for up to a further 500 iterations. After an initial transient created by the adaptation of the grid, the residuals once again fell to their previous, or even lower values.

All computations were carried out on a Silicon Graphics Origin 2000 server. This machine has sixteen R10000 processors running at 250~MHz and is equipped with 4~GB of mem-



ory. Typically, the initial 500 iterations on the un-adapted grid required a little less than 40 hours of CPU time on a single processor, and occupied approximately 460~MB of memory. After adaptation, the additional 500 iterations used somewhat more resources, the exact amount depending on the number of tetrahedra in the adapted grid. While the vast majority of the calculations presented were carried out on a single CPU, the RAMPANT code may be run in parallel. Thus far, no more than four parallel processors have been used, yielding a speed-up of just over 3.8 compared with a single processor.

The RAMPANT predicted carriage loads were input into the Australian six-degree-of-freedom code, in conjunction with the experimental store freestream data, and the trajectories were calculated in a manner similar to those in Reference 17. The Australian code has an unusual feature that allows it to calculate a yaw restraint between the pistons and the store during the ejector stroke, which lasted for approximately 0.07 seconds. The yaw attitude would have been in excellent agreement with the flight test data if the prediction were displaced by 0.07 sec. It appears that for this case, the trajectory code did not properly account for the constraint between the pistons and store. However, there have been numerous flight test cases where the store was clearly constrained in yaw during the ejection stroke. The constraint feature will become more useful once it has been calibrated with flight results.

The pitch attitude prediction was in reasonable agreement with the test data, although it overpredicted the test data by approximately 20% at both Mach numbers. The roll attitude was in excellent agreement with the flight test results; the yaw constraint might have fortuitously helped to constrain the roll.

### **NRC IAR Canada**

The last paper described<sup>23</sup> the quasi-steady CFD approach developed at the Institute for Aerospace Research (IAR) of the National Research Council of Canada (NRC). It consists of three different modules:

- 1) A steady-state 3D unstructured inviscid solver, FJ3SOLV.
- 2) A 6-DOF Store Separation Model (SSM), and
- 3) A grid motion technique.

Each of these modules could be used separately.

To apply the IAR approach to the F/A-18C JDAM CFD Challenge, the three modules were coupled in a quasi-steady mode using the following methodology:

For a given store position, compute the steady-state aerodynamic loads acting on the store using FJ3SOLV. Feed the CFD predicted aerodynamic loads into the 6-DOF SSM and, for a small time increment compute the new store CG location and angular orientations.

If grid motion is possible, move the store and grid nodes using spring analogy technique to store's new position and go to step 1. If grid motion is not possible or grid cells become inadequate after node movement, move the store to its new position, generate a new grid, interpolate the solution to the new grid from the previous one and go to step 1. Starting from a clean configuration, suitable for girding, and with a time step of 0.02 sec., it took about two weeks to compute the JDAM trajectory for a time period of 0.24 seconds. The Canadian results were very similar to the others shown.

### **OTHER RESULTS**

Two other organizations that tried to take part in the Challenge were not able to present their results in Reno. Their approach differed from all the previous papers since they used a structured

grid approach based on the chimera formulation. The results presented are described below.

### AFSEO

The Applied Computation Fluid Dynamics (ACFD) group within the Air Force Seek Eagle Office (AFSEO) also computed the F/A18C/JDAM Challenge cases<sup>24</sup> using a fully time accurate CFD simulation.

The ACFD group utilized the Beggar flow solver originally developed at the Air Force Wright Laboratory at Eglin AFB with development continuing within the AFSEO by the ACFD group.

The separation of the JDAM from the F/A18C at Mach 0.962 was simulated using the Beggar code assuming inviscid flow. The grid system for the F/A18C, the JDAM, and assorted auxiliary grids utilized a total of 39 single block grids and 12 multi-block grids with a total of 95 grids and 2.8 million grid points. The JDAM grid alone contained 360,000 points. The grid system was generated in approximately one man month.

The separation simulation was run at a physical time step of one millisecond and was terminated at a solution physical time of 0.42 seconds. The solution was run on 16 processors for the flow field solution with another 2 processors used for the grid assembly process. The execution time varied somewhat with an average wall clock time of 160 seconds per time step on an SGI Origin 2000 with 250MHZ MIPS R10000 processors. Thus, a simulation out to 0.25 second in physical time could be performed in less than 12 hours. Each flow solver process utilized between 75 and 132 Megabytes of memory with the total memory requirements of 1.6GB for the flow solver. Each of the two grid assembly processes utilized another 512MB of memory.

The agreement shown in general was excellent, with the inviscid results slightly over predicting the pitch and yaw angles. The preliminary viscous results showed an improvement in

the agreement with the flight test data. The inviscid prediction of the roll angle was generally good and captured the general trends. The viscous agreement degraded at later times when the JDAM was at large yaw and pitch angles.

### AEDC

AEDC performed time-accurate viscous computations to simulate the trajectory simulations for both flight release conditions<sup>25</sup> utilizing the chimera overset grid approach. The process for predicting time-accurate body motion relies on four codes, NXAIR to solve the fluid dynamic equations, PEGSUS to define the inter-grid communications, FOMOCO to compute the store loads for overlapping surfaces entities, and SIXDOF to solve the rigid-body equations of motion.

The F-18C surface definition was prepared from a CAD definition. A significant portion of the effort involved preparing the aircraft surface from the CAD definition, which was accomplished in approximately one month. Volume grid generation and setting up the PEGSUS inputs required about two to three weeks. To reduce the number of grid points to define the boundary layer, wall functions were utilized. The overall grid system, comprised of  $7.0 \times 10^6$  mesh points, is distributed over 66 individual overset meshes ( $5.2 \times 10^6$  points over 47 meshes for the F-18C and  $1.8 \times 10^6$  over 23 meshes for the JDAM). All detail of the JDAM was modeled including the strakes and fin gaps. The aircraft engine duct was modeled to compute flow through the duct. Lateral symmetry about the aircraft center plane was assumed, and only the port side of the aircraft was modeled.

Given the release conditions and ejector model, the two separation trajectories were simulated by using the aforementioned codes. The turbulent Navier-Stokes equations were solved with the two-equation SST turbulence model. Duct flow was established to a corrected mass flow rate at approximately 145 lbm/sec for

both release conditions. The steady-state solutions of the flow field about the carriage configuration were performed until convergence was achieved for the store loads to approximately three decimal places. The steady state and trajectory computations were performed on a SGI Origin 2000 R10000 and level loaded over 16 processors. Computations to determine the steady-state carriage loads required approximately 600 steps for each case. The time-accurate computations took 500 time steps to compute the 0.4-second trajectory. The total CPU time to complete one case (including both the steady state and dynamic portion of the computations) was 2900 CPU hours (1400 for the steady-state solution and 1500 for the dynamic solution). Approximately 25 percent of the time in the time-accurate portion of the problem are required by PEGSUS. Because computer resources had to be shared with other users, only part-time usage of 16 processors was available and the wall clock time to complete each trajectory simulation (steady state and dynamic portion) was two weeks. With dedicated usage of 64 processors on an Origin 2000, the computations could be completed in less than 2 days.

Comparisons between computed orientation and flight telemetry data showed excellent agreement in pitch and roll while the computed yaw showed a slightly larger nose outboard angle. The computed store displacements and miss distance for the supersonic case showed somewhat better agreement than for the subsonic case.

### Summary of ACFD Challenge II

The quality of the invited papers and presentations reinforced the approach used by the ACFD Challenge sponsors. However, taking these presentations as representative of state of the art for applying current CFD-based tools for stores carriage and separations indicates that wind tunnels will still be relied on for the provision of the major part of the aerodynamic data on which

stores certification are to be safely based. Indeed it is acknowledged that the CFD solutions were in the majority of cases within the error range of the wind tunnel and flight test data. Accuracy would not therefore seem to be issue, but rather the time required to produce a solution needs to be decreased significantly. Given this development CFD-based tools should become far more prevalent in use during Requirements Definition and Systems Engineering trade-off studies for the aircraft and stores thereby reducing the likelihood of expensive aircraft and/or store redesign after hardware has been made.

One other general result was the consensus that improvements in the ejector modeling and ejector foot/store interaction during the ejection needed to be accomplished.


One of the principal drawback of CFD Challenge II was that all the CFD results, using both Euler and Navier Stokes, as well as a simulation that ignored the JDAM canards gave similar results. Does that mean that Navier Stokes formulation does not have to be used, or were the test cases selected fortuitous for the inviscid formulation. Indeed, Welterlen showed that his inviscid calculation was superior to the viscous one. Since diagnostic data were not available, it is impossible to say whether the SPLITFLOW viscous formulation was at fault, or that the inviscid results had a fortuitous canceling error. It was the consensus of the participants that another CFD Challenge, one that would have diagnostic data (store and wing pressures) was merited.

### FUTURE PLANS

Recently, It has been shown that (pressure sensitive paint) PSP can be used to evaluate store pressures; furthermore, wind tunnel test data on the F-18 aircraft with and without the TFLIR (targeting forward looking infrared radar) have demonstrated extreme Mach number sensitivity,

as may be seen in Figure 9. This effect was confirmed by recent F-18/MK-84 flight test results.

It is anticipated that ACFD Challenge III will make use of PSP wind tunnel results for the F-18 aircraft with the TFLIR on, as well as the F-18/MK-84 flight test data.

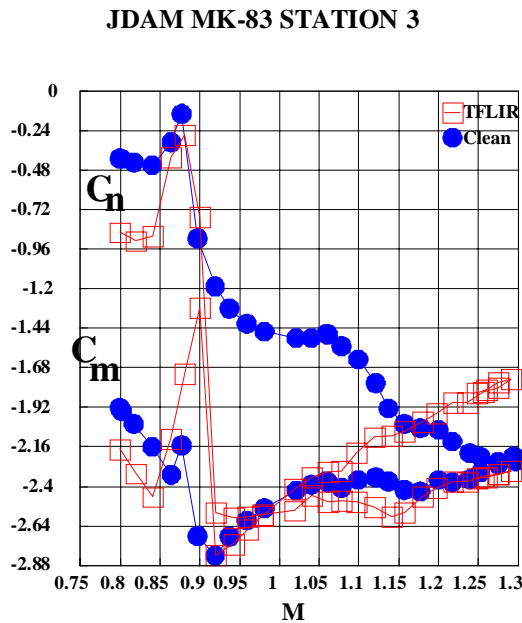

**FIGURE 9 Mach Sweep**

## ACKNOWLEDGEMENTS

The authors wish to express their appreciation to Drs. Tomaro, Woodson, Welterlen, Fairlie, Benmeddour, Noak and Sickles for providing a summary of their results.

## REFERENCES

- [1] Cheveney, J. V., "The Challenge of Combat Superiority Through Modernization," Keynote Paper RTO Symposium on Aircraft Weapon System Compatibility and Integration, Chester, UK, Oct. 1998.
- [2] F. Taverna and A. Cenko, "Navy Integrated T&E Approach to Store Separation," Paper 13, RTO Symposium on Aircraft Weapon System Compatibility and Integration, Chester, UK, Oct. 1998.
- [3] Heim, E., "CFD Wing/Pylon/Finned-Store Mutual Interference Wind Tunnel Experiment," AEDC-TSR-91-P4, 1991.
- [4] Newman, J.C. and Baysal, O. "Transonic Solutions of a Wing/Pylon/Finned Store Using Hybrid Domain Decomposition, AIAA paper 92-4571, Aug. 1992.
- [5] Parikh, P., Pirzadeh, S., and Frink, N.T., "Unstructured Grid Solutions to a Wing/Pylon/Store Configuration Using VGRID3D/USM3D," AIAA Paper 92-4572, Aug. 1992.
- [6] Meakin, R., "Computations of the Unsteady Viscous Flow about a Generic Wing/Pylon/Finned-Store Configuration," AIAA Paper 92-4568, Aug. 1992.
- [7] Millett, D., "More than a Pretty Picture," Leading edge, Dec. 1992.
- [8] Madson, M. et al "TranAir Computations of the flow about a Generic Wing/Pylon/Finned-Store Configuration," AIAA paper 94-0155, Jan. 1994.
- [9] T. Welterlen, et al, "Application of Viscous, Cartesian CFD to Aircraft Store Carriage and Separation Simulation," AIAA-96-2453, June 1996.
- [10] Madson, M. and M. Talbot, "F-16/Generic Store Carriage Load Predictions at Transonic Mach Numbers using TranAir," AIAA-96-2454, June, 1996.
- [11] D. Chine, et al, "Calculation of Generic Store Separation from an F-16 Aircraft," AIAA-96-2455, June 1996.
- [12] S. Kern and C. Bruner, "External Carriage Analysis of a Generic Finned-Store on the F-16 Using USM3D," AIAA-96-2456, June 1996.
- [13] S. Kennon, et al, "STORESIM: An Integrated System for Multi-Body CFD Simulation," AIAA-96-2458, June 1996.
- [14] T. Wey and F. Martin, "Application of the OVERFLOW Code to the F-16 Configuration," AIAA-96-2459, June 1996.
- [15] Cenko, A., "ACFD Applications to Store Separation," ICAS Paper 98-2.10.4, Sept. 1988.
- [16] Cenko, A., "F-18C/JDAM CFD Challenge Wind Tunnel and Flight Test Results," AIAA Paper 99-0120, Jan. 1999.
- [17] Hall, L., "Navier-Stokes/6-DOF Analysis of the JDAM Store Separation from the F/A-18C Aircraft," AIAA Paper 99-0121, Jan. 1999.
- [18] Tomaro, R., et. al., "A Solution on the F-18C for Store Separation Simulation using COBALT," AIAA Paper 99-0122, Jan. 1999.
- [19] Woodson, S., and Bruner, C., "Analysis of Unstructured CFD Codes for the Accurate Prediction of A/C Store Trajectories," AIAA Paper 99-0123, Jan. 1999.

- [20] Welterlen, T., "Store Release Simulation on the F/A-18C Using Split Flow," AIAA Paper 99-0124, Jan. 1999.
- [21] McGroy, W., et. al., "Store Trajectory Analysis About the F/A-18C Using GUST Unstructured Grid Generation and Flow Solver Package," AIAA Paper 99-0125, Jan. 1999.
- [22] Fairlie, B., and Caldeira, R., "Prediction of JDAM Separation Characteristics from the F/A-18 Aircraft," AIAA Paper 99-0126, Jan. 1999.
- [23] Benmeddour, A., "Application of the Canadian Code to the F/A-18C JDAM Separation," AIAA Paper 99-127, Jan. 1999.
- [24] Noak, R., and Jolly, B., "Fully Time Accurate CFD Simulations of JDAM Separation from an F-18C Aircraft," AIAA Paper 2000-0794, January, 2000.
- [25] Sickles, W. L., Denny, A. G., Nichols, R. H. " Time-Accurate CFD Predictions for the JDAM Separation from an F-18C Aircraft," AIAA Paper 2000-0796, January 10-13, 2000.