

# PERFORMANCE OF THE WAKE VORTEX PREDICTION AND MONITORING SYSTEM WSVBS AT FRANKFURT AIRPORT

**Frank Holzäpfel, Thomas Gerz**  
**Deutsches Zentrum für Luft- und Raumfahrt**  
**Institut für Physik der Atmosphäre**  
**Oberpfaffenhofen, Germany**

**Keywords:** *wake vortex, airport capacity, closely-spaced parallel runways, meteorology, safety*

## Abstract

*The design and performance of the Wake Vortex Prediction and Monitoring System WSVBS are described. The WSVBS has been developed to tactically increase airport capacity for approach and landing on closely-spaced parallel runways. It is thought to dynamically adjust aircraft separations dependent on weather conditions and the resulting wake vortex behaviour without compromising safety. Dedicated meteorological instrumentation and short-term numerical terminal weather prediction provide the input to the prediction of wake-vortex behaviour and respective safety areas. As a safety net a LIDAR monitors the correctness of WSVBS predictions in the most critical gates at low altitude. The WSVBS is integrated in the arrival manager AMAN of DLR. Within 66 days of performance test at Frankfurt airport it was found that the system ran stable and the predicted minimum separation times were safe. The capacity improving concepts of operation could have been used in 75% of the time. From fast-time simulations the eventual capacity gain for Frankfurt was estimated to be 3% taking into account the real traffic mix and operational constraints in the period of one month.*

## 1 Introduction

Aircraft trailing vortices may pose a potential risk to following aircraft. The empirically motivated separation standards between consecutive aircraft which were introduced in

the 1970s still apply. These aircraft separations limit the capacity of congested airports in a rapidly growing aeronautical environment. Capacity limitations are especially drastic and disagreeable at airports with two closely-spaced parallel runways (CSPR) like Frankfurt Airport (Germany) where the potential transport of wakes from one runway to the adjacent one by crosswinds impedes an independent use of both runways.

The most rapid growth scenario within a Eurocontrol study [1] indicates that in the year 2025 sixty European airports could be congested and as a result 3.7 million flights per year could not be met. This is opposed by an estimate of annual savings of US \$ 15 million per year and airport that could be achieved by the introduction of a wake-vortex advisory system [13]. A survey on wake-vortex advisory systems and modifications of procedures that are meant to increase airport capacity is available in [22].

DLR has developed the Wake Vortex Prediction and Monitoring System (WirbelSchleppen-Vorhersage- und -BeobachtungsSystem WSVBS [8]) to tactically increase airport capacity for approach and landing. The WSVBS is thought to dynamically adjust aircraft separations dependent on weather conditions and the resulting wake vortex behaviour without compromising safety. The system is particularly adapted to the closely spaced parallel runway system of Frankfurt airport. Nevertheless, the elements of the WSVBS are generic and can well be adjusted to other runway systems and airport locations. The

system predicts wake vortex transport and decay and the resulting safety areas along the glide slope from final approach fix to threshold.

The manuscript describes the design of the WSVBS with all its components and their interaction and the promising performance during a three-month measurement campaign at Frankfurt Airport. Precursor versions of this paper have been presented before [9], [18].

## 2 System Overview

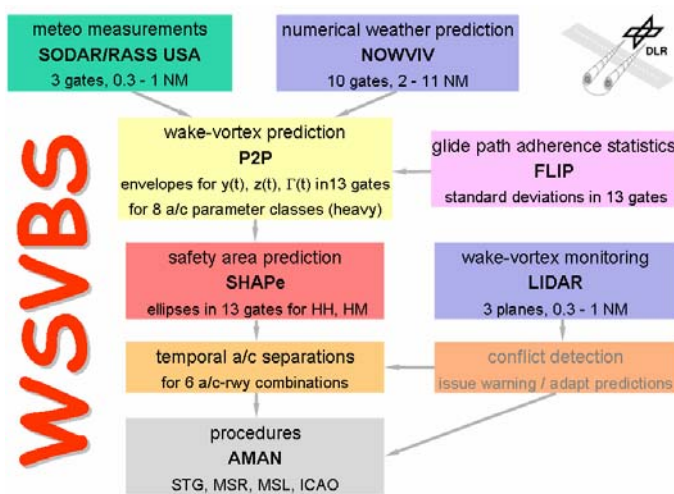


FIG 1. Flowchart of the WSVBS.

FIG 1 delineates the components of the WSVBS and their interplay. The bottleneck of runway systems prevails in ground proximity because there stalling or rebounding wake vortices may not descend below the flight corridor. Therefore in that domain the best wake prediction skill is required which here is achieved based on measurements of meteorological conditions with a SODAR/RASS system and an ultra sonic anemometer (USA). Because it is not possible to cover the whole glide slope with such instrumentation, the meteorological conditions in the remaining area are predicted with a numerical weather prediction system (NOWVIV) leading to wake predictions with increased uncertainty bounds. Based on glide path adherence statistics (FLIP) the probabilistic wake vortex model P2P predicts upper and lower bounds for position and strength of vortices generated by heavy aircraft. These

bounds are expanded by the safety area around a vortex that must be avoided by follower aircraft for safe and undisturbed flight (SHAPe). The instant when these safety areas do not overlap with the flight corridor define temporal aircraft separations that are translated into established procedures by the arrival manager (AMAN). As a safety net the LIDAR monitors the correctness of WSVBS predictions in the most critical gates at low altitude. The components of the WSVBS are described in detail in section 4.

## 3 Topology

The WSVBS requires that all aircraft are established on the glide slope at the final approach fix (FAF) which is situated 11 NM before the touchdown zone (TDZ). For each runway wake-vortex evolution is predicted within 13 gates along the final approach. In ground proximity the gate separation of 1 NM is reduced to 1/3 NM to properly resolve the interaction of wake vortices with the ground. FIG 2 delineates the parallel runway system with the employed geodetic coordinate system and a few gates next to the ground. The parallel runways and consequently also the gate centres are laterally spaced by 518 m and axially displaced by 226.5 m.

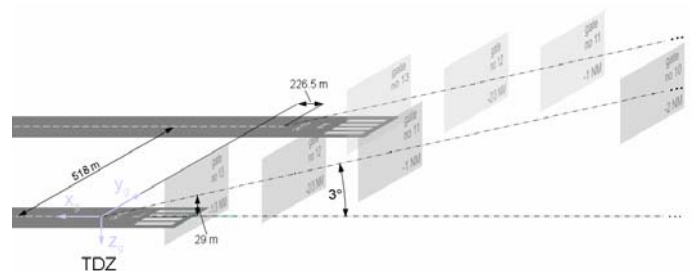


FIG 2. Zoom on gate topology for Frankfurt's closely-spaced parallel runway system.

## 4 System components

It is planned to adjust the different system components to consistent probability levels such that the WSVBS will meet accepted risk probabilities as a whole. Since a comprehensive risk assessment of the WSVBS is still pending, we currently employ 95.4% probabilities (two

standard deviations,  $2\sigma$ , for Gaussian distributions) as a basis for the probabilistic components of the WSVBS. The following sections describe the components delineated in the flowchart in FIG 1 in detail.

## 4.1 Meteorological Data

For prediction of wake-vortex behaviour along the final approach path meteorological conditions with good accuracy must be provided for the complete considered airspace with a forecast horizon of 1 hour. A combination of measurements (employing the persistence assumption) and numerical weather predictions accounts for the required temporal and spatial coverage.

### 4.1.1 Instrumentation

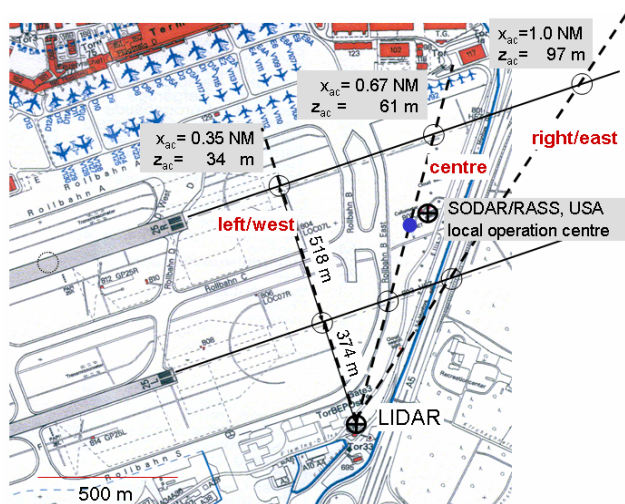


FIG 3. Sketch of instrumentation set-up at Frankfurt Airport.  $x_{ac}$ ,  $z_{ac}$  denote the distance to touch-down zone (TDZ) and the height of landing aircraft in the three vertical LIDAR scan planes (dashed lines). Map reprinted by courtesy of Fraport AG.

FIG 3 shows runways 25L and 25R with the locations of the employed sensors and the local operation centre (LOC) which is situated in the observer house of the German weather service (DWD). Close to the LOC midway between the glide paths a METEK Sodar with a RASS extension provides 10-minute averages of vertical profiles of the three wind components, vertical fluctuation velocity, and virtual temperature with a vertical resolution of 20 m.

The Sodar/RASS system is complemented by an ultrasonic anemometer (USA) mounted on a 10 m mast. Eddy dissipation rate (EDR) profiles are derived from vertical fluctuation velocity and the vertical wind gradient employing a simplified budget equation [5]. A spectral analysis of the longitudinal velocity measured by the sonic is used to estimate EDR by fitting the  $-5/3$  slope in the inertial subrange of the velocity frequency spectrum.

### 4.1.2 Numerical Weather Prediction

The non-hydrostatic mesoscale weather forecast model system NOWVIV (NOWcasting Wake Vortex Impact Variables) is used to predict meteorological parameters in the area which is not covered by measurements (the more remote 10 gates from 2 to 11 NM). NOWVIV has been successfully employed for predictions of wake vortex environmental parameters in several field campaigns [18]. Detailed descriptions of NOWVIV and its nowcasting skill are available in [6], [7], [8].

Within the forecast system NOWVIV, the mesoscale model MM5 [10] predicts the meteorological conditions for the Frankfurt terminal area in two nested domains with sizes of about  $250 \times 250 \text{ km}^2$  and about  $90 \times 90 \text{ km}^2$  centred on Frankfurt airport with grid distances of 6.3 km and 2.1 km, respectively. 60 vertical levels are employed such that in the altitude range of interest ( $z < 1100 \text{ m}$  above ground) 26 levels yield a vertical resolution varying between 8 m and 50 m.

Initial and boundary data are taken from the operational weather prediction model LM (Local Model, [3]) of DWD (German Weather Service). These data represent the best possible forcing of NOWVIV since actual observations (radio soundings, AMDAR (Aircraft Meteorological Data Relay), satellite data, surface observations, etc.) are used to analyse the state of the atmosphere. Detailed topography, land use and soil type data for the Frankfurt area are employed.

NOWVIV runs twice a day (at 00 and 12 UTC) on a dedicated LINUX cluster at University of Stuttgart. Profiles of meteorological data are extracted at gates 1 through 10 with an output frequency of 10

minutes. The meteorological quantities comprise the three wind components, air density, virtual potential temperature, turbulent kinetic energy, eddy dissipation rate (EDR), and pressure.

#### 4.1.3 Integration of Meteorological Data

For approaches the largest probability to encounter wake vortices prevails at altitudes below 300 ft [2], [19], [22]. There stalling or rebounding vortices may not clear the flight corridor vertically and weak crosswinds may be compensated by vortex-induced lateral transport which may prevent the vortices to quit laterally. Since vortex decay close to the ground is almost not sensible to meteorological conditions [17] the most important mechanism that may allow for reduced aircraft separations is lateral transport of wake vortices by crosswind.

Ref. [6] demonstrates that the best wake-vortex prediction skill of lateral transport in ground proximity is achieved employing SODAR wind measurement data. Only if it is assumed that the measured wind would persist longer than about one hour, the lateral vortex transport predicted with NOWVIV input would yield on average superior results.

Because it is not feasible to cover the complete final approach path with instrumentation we employ SODAR/RASS data for wake prediction in the bottleneck at low altitudes (gates 11 – 13) whereas for the less critical area aloft we use NOWVIV data which yields minor wake prediction skill.

## 4.2 Approach Corridor Dimensions

For the definition of approach corridor dimensions we employ the glide path adherence statistics of the FLIP study [4], an investigation of the navigational performance of ILS (Instrument Landing System) approaches at Frankfurt airport. FLIP provides statistics of 35,691 tracks of precision approaches on Frankfurt ILS of runways 25L/R. It does not differentiate between manual and automatic approaches. The study indicates that the measured flight path deviations are much smaller than specified by ICAO localizer and glide slope tolerances. The employed corridor dimensions decrease monotonically when

approaching the runways and are kept constant within a distance of 2 NM from TDZ.

The approach corridors in the different gates consist of ellipses (see green ellipses in FIG 7). Vertical and horizontal semi axes of these ellipses correspond to two standard deviations derived from glide path adherence statistics, respectively. For Gaussian distributions two standard deviations ( $2\sigma$ ) correspond to a probability of 95.4% that an aircraft does not leave the corridor in one dimension (either laterally or vertically). For ellipsoidal corridors this probability reduces to 86.5% assuming statistical independence of lateral and vertical positions.

## 4.3 Aircraft Weight Classes

In principle, the WSVBS could predict conservative separations for individual aircraft pairings provided that the approaching aircraft types are known. However, in order to keep the system as simple as possible and, thus, to minimize additional workload for controllers, the WSVBS only considers aircraft weight class combinations. For Frankfurt airport the relevant combinations are heavy followed by heavy (HH) and heavy followed by medium (HM).

To conservatively represent generator aircraft parameters of the heavy weight category at first fits are established which bound a representative compilation of parameters of existing aircraft as function of the maximum take-off weight (see green lines in FIG 4).

FIG 4 and TAB 1 illustrate the way initial circulations, wing spans, and approach speeds are combined at the weight class boundaries. The B747-400 with a MTOW of 397 t is chosen as upper limit of the heavy weight category. TAB 1 lists the 8 resulting parameter combinations which conservatively represent all possible generator aircraft within the heavy weight category. In FIG 4 and TAB 1 the first u (l) denotes the upper (lower) bound of the weight class and the second u (l) upper (lower) fits at a given weight class boundary. The resulting wide variations of initial vortex descent speed and wake vortex time scales (variations by almost a factor of four) which are

employed for any approaching aircraft indicate one of the conservative margins of the WSVBS.

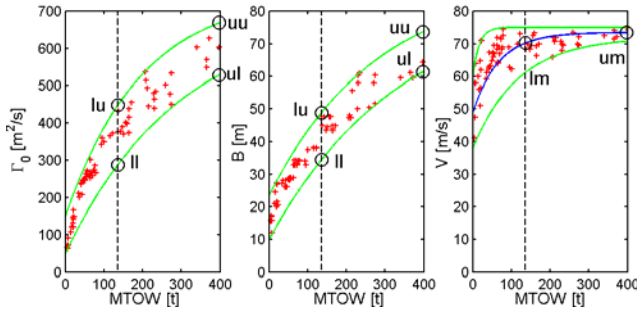


FIG 4. Initial circulation,  $\Gamma_0$ , wing span,  $B$ , and flight speed,  $V$ , for final approach as function of maximum take-off weight, MTOW, for 73 aircraft types. Green lines border aircraft parameters, circles denote the parameters which are combined to represent the aircraft weight class heavy.

parameter comb.	$\Gamma_0$ [m <sup>2</sup> /s]	$b_0$ [m]	$V$ [m/s]	char. time scale $t_0$ [s]	desc. speed $w_0$ [m/s]
$\Gamma_{0uu} b_{0uu}$	669.2	57.9	73.5	31.5	1.84
$\Gamma_{0uu} b_{0ul}$	669.2	48.2	73.5	21.8	2.21
$\Gamma_{0ul} b_{0uu}$	528.5	57.9	73.5	<b>39.9</b>	1.45
$\Gamma_{0ul} b_{0ul}$	528.5	48.2	73.5	27.6	1.75
$\Gamma_{0lu} b_{0lu}$	448.1	38.4	70.3	20.7	1.86
$\Gamma_{0lu} b_{0ll}$	448.1	27.1	70.3	<b>10.3</b>	<b>2.63</b>
$\Gamma_{0ll} b_{0lu}$	288.2	38.4	70.3	32.1	<b>1.19</b>
$\Gamma_{0ll} b_{0ll}$	288.2	27.1	70.3	16.0	1.69

TAB 1. Aircraft parameter combinations for initial circulation,  $\Gamma_0$ , vortex separation,  $b_0$ , and flight speed,  $V$ , which represent the aircraft weight class heavy and resulting characteristic time scales and initial descent speeds (maxima and minima in bold).

#### 4.4 Wake-Vortex Prediction

Wake-vortex prediction is conducted with the Probabilistic Two-Phase wake-vortex decay model (P2P) which is described in detail in [14]. Applications, assessments and further developments are reported in [6], [15], [16], and [17]. P2P considers all effects of the leading order impact parameters: aircraft configuration (span, weight, velocity, and trajectory), wind (cross and head components), wind shear, turbulence, temperature stratification, and ground proximity. P2P has been validated

against data of over 1,400 cases gathered in two US and six European measurement campaigns.

Precise deterministic wake vortex predictions are not feasible operationally. Primarily, it is the nature of turbulence that deforms and transports the vortices in a stochastic way and leads to considerable spatiotemporal variations of vortex position and strength. Moreover, the variability of environmental conditions must be taken into account. Therefore, the output of P2P consists of confidence intervals for vortex position and strength (see FIG 5). FIG 5 illustrates asymmetric vortex rebound characteristics caused by crosswind in ground proximity.

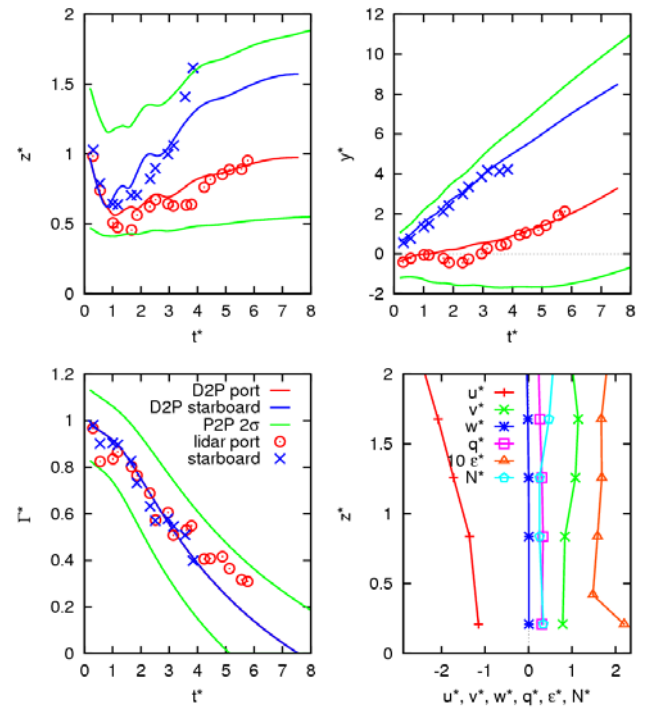


FIG 5. Evolution of normalized vertical and lateral positions and circulation in ground proximity. Measurements by lidar (symbols) and predictions with P2P wake vortex model (lines). Red and blue lines denote deterministic behaviour; green lines are probabilistic envelopes (95.4%). Right below vertical profiles of measured meteorological parameters. Normalizations based on initial values of vortex spacing, circulation, and time needed to descend one vortex spacing.

For the time being, the confidence intervals for  $y$ ,  $z$ , and  $\Gamma$  are adjusted to  $2\sigma$ -probabilities. The

respective uncertainty allowances are achieved by a training procedure which employs statistics of measured and predicted wake vortex behaviour [16]. Note that the training procedure implicitly considers the quality of the meteorological input data. As a consequence, uncertainty allowances of wake-vortex predictions based on the high-quality SODAR/RASS measurements in the lowest three gates are smaller than uncertainty allowances applied to wake-predictions at higher altitudes which are based on NOWVIV input.

#### 4.5 Safety-Area Prediction

Once the potential positions of the wake vortices at each gate are known, safe distances between wake vortex core positions and the follower aircraft need to be assigned. The Simplified Hazard Area (SHA) concept [12], [21] predicts distances which guarantee safe and undisturbed operations.

The SHA-concept assumes that for encounters during approach and landing the vortex induced rolling moment constitutes the dominant effect and can be used to define a safety area representing the entire aircraft reaction. Then encounter severity can be characterized by a single parameter, the required Roll Control Ratio  $R_{CRreq}$  which relates the roll control input that is required to compensate the exerted rolling moment to the maximum available roll control power.

In FIG 6 the red areas with  $R_{CRreq} > 1$  denote regions where the roll capability of the follower aircraft is exceeded. Full flight simulator investigations yield acceptable results for manual control for a value of  $R_{CRreq} = 0.2$  [20]. Results from real flight tests using DLR's fly-by-wire in-flight simulator ATTAS support this conclusion [19]. In FIG 6 the lines a and b denote the resulting distances between vortex centres and follower aircraft for  $R_{CRreq} < 0.2$  which are added to the wake vortex envelopes.

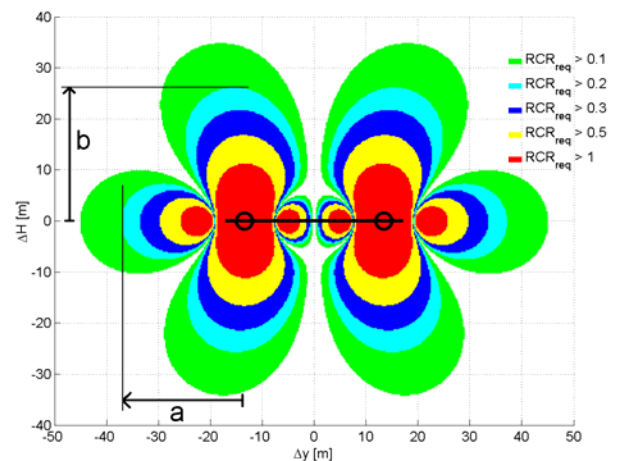


FIG 6. Roll control power required to compensate wake-vortex induced rolling moments. Horizontal and vertical allowances a and b for  $R_{CRreq} < 0.2$ .

As for wake vortex prediction no individual wake vortex and follower aircraft pairings are considered for the WSVBS (although that would be possible) but wake vortex envelopes which represent the heavy category are combined with the follower categories medium or heavy. In order to represent the follower aircraft weight classes heavy and medium all relevant aircraft parameters (wing span, wing area, airspeed, lift gradient, maximum roll control power, and taper ratio) are conservatively combined to mimic the worst case scenarios. The values of the worst case parameter combinations are again derived from envelopes of aircraft parameters as function of MTOW, similarly as it was described in section 4.4 for wake vortex prediction. This method of using MTOW based aircraft parameters for the determination of simplified hazard areas is called SHApe (Simplified Hazard Area Prediction) [12].

## 5 Systems Integration

This section describes how the above introduced components are combined for the prediction of adapted aircraft separations. Section 5.1 considers components within a single gate, section 5.2 then explains how the minimum temporal aircraft separations are derived from the predictions within all the gates. Finally, section 5.3 sketches the temporal prediction

cycle which defines parameters like update rate and prediction horizon.

## 5.1 Components in Single Gate

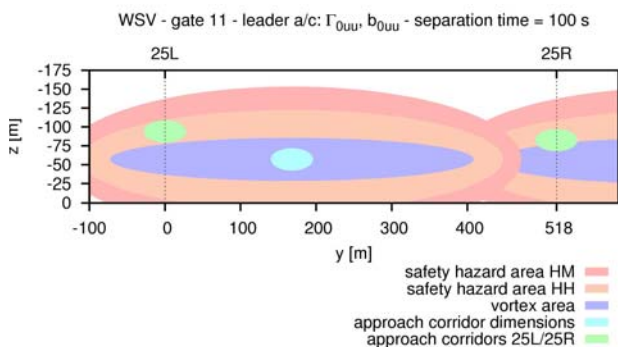


FIG 7. Ellipses denoting approach corridor dimensions, vortex areas, and safety areas in gate 11 for a vortex age of 100 s.

FIG 7 illustrates the process seen in flight direction in control gate 11 for the leader aircraft parameter combination  $\Gamma_{0uu}$ ,  $b_{0uu}$  and a vortex age of 100 s. The different ellipses are defined by the respective sums of vertical and horizontal probabilistic allowances of the components approach corridor, vortex area prediction, and safety area prediction. Note that horizontal and vertical dimensions in FIG 7 are in scale.

The dark blue corridor of possible vortex positions indicates that superimposed to vortex descent a southerly cross-wind advects the wake from runway 25L to 25R. Because the lateral vortex position can only be predicted less precise (uncertainty and variability of crosswind) than vertical position, the aspect ratio of the vortex area ellipse exceeds a value of eight. Out of ground effect this aspect ratio is much smaller because there uncertainties regarding vortex descent are increased [17]. Safety area margins for aircraft pairings HH and HM are added to the vortex corridors, resulting in overall safety areas to be avoided.

One important aspect is that the safety corridors are not static but move depending on wake transport. Further, they grow due to vortex spreading and shrink according to wake decay. For aircraft pairings on approach to a single runway, the time interval between the passage of the generator aircraft through a gate and the

time when a safety area does no longer overlap with the approach corridor (gate obstruction time) determines the minimum temporal separation for that gate. For the parallel runway system, the question is whether the safety areas reach the neighbouring runway within the prediction horizons. The prediction horizons of 100 s for HH and of 125 s for HM are derived from the temporal equivalents to ICAO separations used by the DLR Arrival Manager (AMAN).

Our example in FIG 7 illustrates that after 100 s the vortex area has just left the approach corridor of runway 25L, yet the gate is blocked as both safety corridors still overlap with the approach corridor. On the other hand, after 100 s the safety envelopes for HH and HM have not reached glide path corridor 25R. However, at 125 s the HM envelope obviously will reach the glide path 25R, so that this runway can be used independently from 25L only by heavy aircraft. Safety areas from 25R in turn will not reach the corridor 25L, so 25L can be used independently from 25R for both follower weight categories.

## 5.2 Complete Domain

One prediction sequence comprises 13 gates for each runway, 8 generator aircraft parameter combinations, 3 runway combinations (generator and follower on single runway (25L25L or 25R25R), generator on 25L and follower on 25R (25L25R), and vice versa), and 2 follower weight classes. So in total 1248 cases are considered. From the 1248 cases for each of the 3 runway combinations and 2 follower weight classes the cases with maximum vortex ages with conflicts are identified. These maximum gate obstruction times define minimum aircraft separation times MST. The output of the WSVBS consequently consists of the matrix shown in TAB 2.

Note that the MST in TAB 2 are consistent with the situation displayed in FIG 7. In TAB 2 a MST = 0 s means that no aircraft separation with regard to wake vortices is needed, i.e. vortices do not reach the adjacent runway. In practise the aircraft separations can then be reduced to radar separation (for example 70 s).

rwyt comb.	MST HH [s]	MST HM [s]
25L25L	100	125
25L25R	0	125
25R25L	0	0
25R25R	100	125

TAB 2. Minimum separation times for different runway and weight category combinations.

The predicted MST are translated into four modes or concepts of operation for aircraft separation which have been established by the German Air Safety Provider DFS to be applied to the dependent parallel runway system at Frankfurt Airport under instrumented meteorological conditions (IMC) [11]:

- “ICAO” – standard procedure under IMC with 4 NM for a HH aircraft pair and 5 NM for a HM pair across both runways;
- “Staggered” (STG) – procedure where both runways can be used independently from each other but obeying the radar (minimum) separation of 2.5 NM;
- “Modified Staggered Left” (MSL) – aircraft on right (windward) runway keep 2.5 NM separated from aircraft of left (lee) runway;
- “Modified Staggered Right” (MSR) – aircraft on left (windward) runway keep 2.5 NM separated from aircraft of right (lee) runway.

The idea is that all corridors used in the process and shown in FIG 7 should be based on identical probability levels, currently, twice the standard deviations ( $2\sigma$ ) of respective data. However, the safety area prediction concept on one hand is not probabilistic, i.e. the predicted safety areas are safe without any exception for the investigations conducted so far, and on the other hand it assumes that the wake vortices are situated along the envelopes of the vortex area. A reduction of vortex area allowances to  $1.7\sigma$  (91.1%) causes that the safety areas are only added to 95.4% of the potential wake vortex positions and herewith implicitly confers a  $2\sigma$ -confidence level to the safety area module.

Unfortunately, the very question: “Which overall safety is actually achieved by the combination of the various conservative

elements of the WSVBS?” can not be answered easily. It is planned to adjust all components to consistent confidence levels once the methodology of a comprehensive risk analysis is established.

### 5.3 Prediction Cycle

Every 10 minutes new Sodar/RASS and NOWVIV data are available. Then the WSVBS predicts MST matrices for a 60 min horizon with 10 min-increments. For planning purposes this guarantees availability of predictions for at least 45 min in advance. The last 10 min of the predictions are not touched to ensure the stability of the system.

## 6 Wake-Vortex Monitoring

Wake-vortex monitoring is used to identify potential erroneous predictions of the WSVBS. For this purpose DLR’s 2  $\mu\text{m}$  pulsed Doppler LIDAR is operated in vertical scan mode with elevations between  $0^\circ$  to  $6^\circ$  to detect and track the vortices alternately in the three lowest and most critical gates of runway 25R (see FIG 3). Once the real-time capability of vortex monitoring is established it is foreseen to integrate a conflict detection module which may issue warnings and/or may adapt the WSVBS predictions (see FIG 1).

## 7 Performance and Improved Capacity

A detailed description of the integration of the WSVBS predictions into ATC procedures, the employed controller displays (HMI), and the achieved capacity gain is available in Ref. [9]. Here only a condensed description of these aspects is given.

To check if the WSVBS products and the proposed features on the displays fulfil ATC requirements, are well designed and easy to use, and will eventually improve capacity at Frankfurt Airport, we performed real-time and fast-time simulations using the Air Traffic Management and Operations Simulator (ATMOS II) and the SIMMOD tool of DLR Institute of Flight Guidance at DLR Braunschweig, respectively. During a period of



one week real-time simulations were carried out at the simulator ATMOS II under the assistance of five air traffic controllers from DFS. The investigations aimed at evaluating the behaviour and efficiency of the WSVBS on a real time controller working position and to inquire the controller’s judgement of the system.

By means of a systematic questionnaire the controllers from DFS were interviewed with respect to aspects as acceptance of the simulation environment, acceptance of the WSVBS, procedural regulations and human interface, operational appliance.

The participating controllers generally agreed with the WSVBS system and procedures. In particular, the system does not interfere with their normal working procedures.

We also performed fast-time simulations to obtain capacity figures for the different concepts of operation utilised by WSVBS under real world conditions. To establish a baseline, the simulations were initially performed using ICAO separations. The simulations were then matched with separations derived from WSVBS and re-run. The simulations included flight plans with realistic distributions of wake vortex categories, demand peaks throughout the day, weather data, and the WSVBS proposals for a period of one month. When taking into account the real traffic mix and operational constraints in the period of one month we received a net capacity gain of slightly larger 3%.

FIG 8 summarises the history of DFS operation modes as proposed by WSVBS during the 66 days of performance at the airport (not considering any traffic mix). In 75% of the time the modes, which allow improving capacity or punctuality of landing aircraft, could have been deployed. The focus on five days (FIG 8 below) indicates that each mode can be deployed throughout a significant fraction of time.

In the 66 days the procedures MSL/MSR/STG could have been used 36/7/14 times for 10 minutes only. However, a continuous use of these ConOps for 1 hour would have been possible 16/13/10 times, respectively. Even a usage as long as 8 hours would have been feasible still 2/2/1 times. Due to the strong wind conditions in January it would even have been

possible to use MSR for HH pairings once throughout almost 4 days (93 hours).

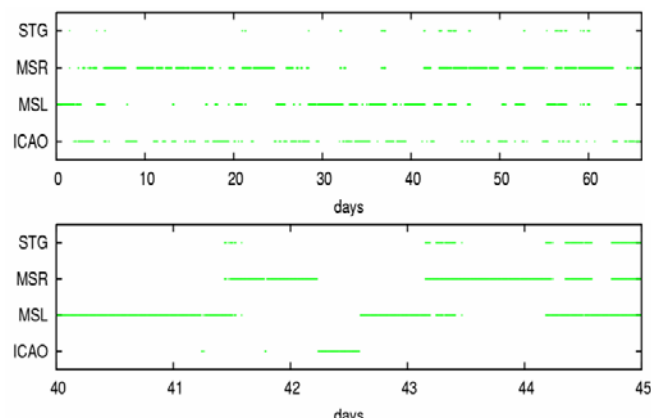


FIG 8. History of usage of the 4 DFS operation modes during the 66 days of the campaign at Frankfurt. Top: full period; bottom: zoom on five days.

FIG 9 shows an example of traces of the port and starboard vortices of heavy aircraft landing on runway 25R as measured by the safety net LIDAR on the 8<sup>th</sup> of February in the three scan planes shown in FIG 3. The WSVBS recommended to use operations STG followed by MSR. The LIDAR data from 32 landing heavy aircraft confirm the predictions: the wind is very weak and does not transport the vortices to the adjacent runway.

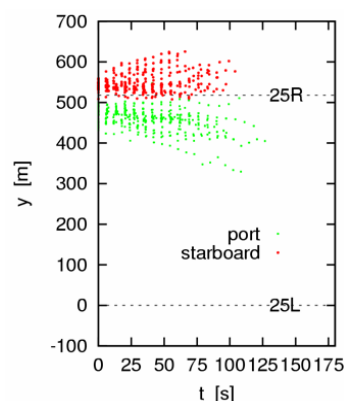


FIG 9. Lateral positions of wake vortices versus vortex age from 32 heavy aircraft landing on 25R on 8<sup>th</sup> Feb. 2007 as tracked by the LIDAR in the three scan planes.

The (manned) LIDAR did not measure continuously throughout the campaign. It was operated on 16 days where it traced the wake vortices of about 1100 landing heavy aircraft in

the three most critical control gates (FIG 3). In all these cases it was found that the recommended operation mode was well predicted – no vortices were detected in the flight corridor after the predicted minimum separation time.

## 8 Conclusions

The manuscript describes the design of the Wake Vortex Prediction and Monitoring System WSVBS with all its components and their interaction. The WSVBS consists of components that consider meteorological conditions, aircraft glide path adherence, aircraft parameter combinations representing aircraft weight categories, the resulting wake-vortex behaviour, the surrounding safety areas, wake vortex monitoring, and the integration of the predictions into the arrival manager. The elements of the WSVBS are generic and can well be adjusted to runway systems and airport locations. The prediction horizon is larger than 45 min (as required by air traffic controllers) and updated every 10 minutes. It predicts the concepts of operations and procedures established by DFS and it further predicts additional temporal separations for in-trail traffic.

A specific feature of the WSVBS is the usage of both measured and predicted meteorological quantities as input to wake vortex prediction. In ground proximity where the probability to encounter wake vortices is highest, the wake predictor employs measured environmental parameters that yield superior prediction results. For the less critical part aloft, which can not be monitored completely by instrumentation, the meteorological parameters are taken from dedicated numerical terminal weather predictions. The wake vortex model predicts envelopes for vortex position and strength which implicitly consider the quality of the meteorological input data. This feature is achieved by a training procedure which employs statistics of measured and predicted meteorological parameters and the resulting wake vortex behaviour.

The WSVBS combines various conservative elements that presumably lead to a

very high overall safety level of the WSVBS. a) Wake vortex prediction as well as safety area prediction employs worst case combinations of aircraft parameters that represent complete aircraft weight categories. b) The wake vortex model assumes that the aircraft are situated on the envelopes of the approach corridors. (The probability that this assumption actually occurs is extremely small.) Likewise, the safety area model assumes that the wake vortices are situated along the wake vortex envelopes. As a consequence the probability to actually encounter wake vortices at the edges of the safety areas is outermost small. c) The most critical within 1248 investigated parameter combinations determines the possible aircraft separations. d) A safety net consisting of a LIDAR that scans the most critical gates at low altitude monitors the correctness of suggested aircraft separations. The combination of these conservative measures certainly leads to a very high but currently unknown overall safety. Once the methodology of a comprehensive risk analysis will be established, it is planned to adjust all components to appropriate and consistent confidence levels.

The WSVBS has demonstrated its functionality at Frankfurt airport during 66 days in the period from 18/12/06 until 28/02/07. The performance test indicates that (i) the system ran stable - no forecast breakdowns occurred, (ii) aircraft separations could have been reduced in 75% of the time compared to ICAO standards, (iii) reduced separation procedures could have been continuously applied for at least several tens of minutes and up to several hours occasionally, (iv) the predictions were correct as for about 1100 landings observed during 16 days no warnings occurred from the LIDAR.

Fast-time simulations reveal that the concepts of operation, which were introduced by DFS (i.e. MSL, MSR, STG and keeping 2.5 NM or 70 s as the minimum separation) and utilised by WSVBS for Frankfurt Airport, yield significant reductions in delay and/or an increase in capacity to 3% taking into account the real traffic mix and operational constraints in the period of one month. Relaxing the DFS constraints and allowing more operation modes would further increase capacity.

We consider these capacity gains as tactical. “Tactical” means that the system aims at increasing the punctuality of flight operations as of today by avoiding holding patterns. After experience has gained over some years of application (including diurnal and seasonal statistics of meteorological quantities along the glide path) the system may also allow increasing the number of flight operations at the airport, i.e. gain capacity “strategically”.

Before the WSVBS can be handed over for final adaptations in order to become a customized fully operational system some further steps are planned. DLR will expand the system to include landings on runways 07/L/R. The LIDAR shall be operated automatically and the traced vortex positions shall be used on-line to check for forecast errors and warn the operators in case of an increased risk. Finally, also a risk analysis needs to be pursued to convince all stakeholders of the usefulness and capabilities of our system.

## Acknowledgements

The work presented here was funded by the DLR project *Wirbelschleppe* and benefited from the EU projects *ATC-Wake* (IST-2001-34729), *FAR-Wake* (AST4-CT-2005-012238), *FLYSAFE* (AIP4-CT-2005-516 167), and the European Thematic Network *WakeNet2-Europe* (G4RT-CT-2002-05115). We greatly appreciate the excellent support of the teams from DFS Deutsche Flugsicherung GmbH, DWD Deutscher Wetterdienst, Fraport AG, and METEK GmbH.

## References

- [1] Challenges to Growth 2004 Report, Eurocontrol, Brussels, 2004.
- [2] J.B. Critchley, P.B. Foot, UK CAA Wake Vortex Database: Analysis of Incidents Reported Between 1982 and 1990, Civil Aviation Authority, CAA Paper 91015, 1991.
- [3] G. Doms, U. Schaettler, The nonhydrostatic Limited Area Model LM (Lokal Modell) of DWD. Part I: Scientific Documentation, Deutscher Wetterdienst, Offenbach, 1999.
- [4] H. Frauenkron, M. Maiss, P. Nalpanis, FLIP - Flight Performance using Frankfurt ILS, DFS German Air Navigation Services, Air Traffic Management Division, Version 2.0, 2001.
- [5] M. Frech, Estimating the turbulent energy dissipation rate in an airport environment, *Boundary-Layer Meteorology* 123 (2007) 385-393, doi 10.1007/s10546-006-9149-2.
- [6] M. Frech, F. Holzäpfel, Skill of an Aircraft Wake-Vortex Model Using Weather Prediction and Observation, *J. Aircraft* 45 (2008) 461-470.
- [7] M. Frech, F. Holzäpfel, A. Tafferner, T. Gerz, High-Resolution Weather Data Base for the Terminal Area of Frankfurt Airport, *J. Appl. Meteor. Climat.* 46 (2007) 1913-1932.
- [8] T. Gerz, F. Holzäpfel, W. Bryant, F. Köpp, M. Frech, A. Tafferner, G. Winckelmans, Research towards a wake-vortex advisory system for optimal aircraft spacing, *Comptes Rendus Physique* +6 (2005) 501-523.
- [9] T. Gerz, F. Holzäpfel, W. Gerling, A. Scharnweber, M. Frech, A. Wiegele, K. Kober, K. Dengler, S. Rahm, The Wake Vortex Prediction and Monitoring System WSVBS - Part II: Performance and ATC Integration at Frankfurt Airport, 1st European Air and Space Conference (CEAS 2007) / Deutscher Luft- und Raumfahrtkongress 2007, CEAS-2007-178, 10-13 September 2007, Berlin, Germany, pp. 3391-3399.
- [10] G.A. Grell, S. Emeis, W.R. Stockwell., T. Schoenemeyer, T. Forkel, J. Michalakes, R. Knoche, W. Seidl, Application of a multiscale, coupled MM5/chemistry model to the complex terrain of the VOTALP valley campaign, *Atmosph. Environ.* 34 (2000) 1435-1453.
- [11] Gurke T., Lafferton H. 1997: The development of the wake vortex warning system for Frankfurt Airport: Theory and implementation, *Air Traffic Control Quarterly* 5, 3-29.
- [12] K.-U. Hahn, C. Schwarz, H. Friehmelt, A Simplified Hazard Area Prediction (SHAPe) Model for Wake Vortex Encounter Avoidance, 24th International Congress of Aeronautical Sciences, Yokohama (Japan), 29 August - 3 September 2004, ICAS, 24th International Congress of Aeronautical Sciences Proceedings, 2004
- [13] R. Hemm, G. Shapiro, D.A. Lee, J. Gribko, B. Glaser, Benefit Estimates of Terminal Area Productivity Program Technologies. NASA/CR-1999-208989, 1999, p. 144.

- [14] F. Holzäpfel, Probabilistic Two-Phase Wake Vortex Decay and Transport Model, *J. Aircraft* 40 (2003) 323-331. the ICAS2008 proceedings or as individual off-prints from the proceedings.
- [15] F. Holzäpfel F., R.E. Robins, Probabilistic Two-Phase Aircraft Wake-Vortex Model: Application and Assessment, *J. Aircraft* 41 (2004) 1117-1126.
- [16] F. Holzäpfel, Probabilistic Two-Phase Aircraft Wake-Vortex Model: Further Development and Assessment, *J. Aircraft* 43 (2006) 700-708.
- [17] F. Holzäpfel, M. Steen, Aircraft Wake-Vortex Evolution in Ground Proximity: Analysis and Parameterization, *AIAA J.* 45 (2007) 218-227.
- [18] F. Holzäpfel, T. Gerz, M. Frech, A. Tafferner, F. Köpp, I. Smalikho, S. Rahm, K.-U. Hahn, C. Schwarz, The Wake Vortex Prediction and Monitoring System WSVBS - Part I: Design, 1st European Air and Space Conference (CEAS 2007) / Deutscher Luft- und Raumfahrtkongress 2007, CEAS-2007-177, 10-13 September 2007, Berlin, Germany, pp. 3383-3390.
- [19] F. Holzäpfel, M. Frech, T. Gerz, A. Tafferner, K.-U. Hahn, C. Schwarz, H.-D. Joos, B. Korn, H. Lenz, R. Luckner, G. Höhne, Aircraft Wake Vortex Scenarios Simulation Package - WakeScene, ICAS 2006, 25th International Congress of the Aeronautical Sciences, Hamburg, ICAS 2006-8.6.3, 2006, pp. 12 (*Aerosp. Sci. Technol.* (2008) doi:10.1016/j.ast.2007.09.008).
- [20] C. Schwarz, K.-U. Hahn, Simplified Hazard Area for Wake Vortex Encounter Avoidance, *AIAA Paper* 2005-5903, *AIAA Atmospheric Flight Mechanics Conference*, San Francisco, CA, August 2005, pp. 5903.1 -5903.9.
- [21] C.W. Schwarz, K.-U. Hahn, Full-flight simulator study for wake vortex hazard area investigation, *Aerosp. Sci. Technol.* 10 (2006) 136-143.
- [22] Wake Vortex Research Needs for "Improved Wake Vortex Separation Ruling" and "Reduced Wake Signatures", Final Report of the Thematic Network 'WakeNet2-Europe', 6th Framework Programme, National Aerospace Laboratory, NLR-CR-2006-171, Amsterdam, 2006.

## Copyright Statement

The authors confirm that they, and/or their company or institution, hold copyright on all of the original material included in their paper. They also confirm they have obtained permission, from the copyright holder of any third party material included in their paper, to publish it as part of their paper. The authors grant full permission for the publication and distribution of their paper as part of