

UNCERTAINTY QUANTIFICATION IN THE DEVELOPMENT OF AVIATION OPERATIONS TO REDUCE AVIATION EMISSIONS AND CONTRAILS

Banavar Sridhar*, **Hok K. Ng ****, **Neil Chen ***
***NASA Ames Research Center, Moffett Field, CA 94035-1000**
****University of California, Santa Cruz@Moffett Field**

Keywords: *Aviation operations, Environmental impact,
Simulation and optimization, Contrails, Models*

Abstract

There is increased awareness of aviation-induced environmental impact affecting climate change. Understanding the complexity and uncertainty of the various components of the climate equation requires models, analysis, optimization and validation at several levels. The cost-benefit analysis to make important decisions relies on information where the amount of uncertainty increases as one moves from aircraft systems to weather prediction to climate impact. The main contribution of the paper is the integration of simplified climate models, real weather and traffic data, multiple scenarios and error bounds in a process that can be used to guide operational solutions to reduce the impact of aviation on climate. This methodology is applied to evaluate the trade-off between fuel usage and environmental impact using flights between 12 major city-pairs in the United States. An important conclusion from the study is that contrail reduction maneuvers involving altitude changes produce more fuel efficient results, measured as decrease in surface temperature change for unit amount of fuel, than just horizontal maneuvers. A 2-3% additional fuel usage reduces the surface temperature change to its lowest value. Any reduction in contrails beyond this point is negated by the increase in carbon dioxide emissions. The results suggest that to limit the amount of excess fuel usage while minimizing the environmental impact of aviation operations, it is cost-beneficial to limit contrail reduction maneuvers to days with medium or high amount of contrail formation. These characteristics seem to be true even in the

presence of various uncertainties. Analysis data similar to the results presented in this paper can serve as inputs to the FAA national policy development tools like Aviation Environmental Design Tool and Aviation Environmental Portfolio Management Tool.

1 Introduction

There is increased awareness of aviation-induced environmental impact affecting climate change [1-2]. It is estimated that aviation is responsible for two to three percent of all anthropogenic carbon dioxide (CO₂) emissions. The important non-CO₂ impacts associated with aviation are water vapor, oxides of nitrogen (NO_x), condensation trails (contrails) and cirrus clouds due to air traffic. Contrails are clouds that are visible trails of water vapor made by the exhaust of aircraft engines [3]. The latest estimates indicate that contrails caused by aircraft may be causing more climate warming today than all the residual CO₂ emitted by aircraft [4]. Understanding the complexity and uncertainty of the various components of the climate equation requires models, analysis, optimization and validation at several levels.

Modeling and simulation to understand the impact of aviation on climate covers airspace from small regions to the entire world and intervals of time varying from seconds to several hundred years. The modeling of aircraft emissions and their interaction with each other to change the concentration levels of different gasses in the atmosphere and the resulting impact of the radiative forcing on the equilibrium of the Earth's atmosphere is complex and requires the use of coupled

atmosphere-ocean general circulation models together with three-dimensional models of carbon cycle and chemistry of other non-CO₂ greenhouse gases. These models are computationally intensive and unsuitable for studies involving the generation of multiple scenarios to study the effect of uncertainties. It is possible to use a hierarchy of models with different levels of accuracy subject to computational limitations and driven by the questions to be answered by the modeling process. Using pre-calculated atmospheric data with aircraft emission data generated by climate-chemistry models, AirClim [5], a climate evaluation tool, reduces the computational time in predicting the evolution of gas concentrations, radiative forcing and temperature changes. The development in this paper is oriented towards detailed models of the airspace operations combined with simple climate models. Simple emission and climate models, based on the input/output relations of linear systems, capture the fundamental emission to climate impact behavior by careful selection of key variables and their dynamics.

The Future Air Traffic Management Concepts Evaluation Tool (FACET) [6], a national level air traffic system simulation and optimization tool, was integrated with aircraft emission models and contrail formation models to create a capability that provides both CO₂ and non-CO₂ emissions resulting from current and future operational concepts and policies. This enables the inclusion of environmental impact metrics as a standard metric/criteria for airspace simulations. However, there is considerable uncertainty about the underlying atmospheric science required to assess the impacts of these emissions, as well as the emissions estimates themselves, in some cases.

The paper presents results on reducing the impact of aviation on climate as a trade-off between the amount of reduction in the changes to the mean surface temperature of the Earth due to CO₂ emissions and contrails and the extra fuel cost associated with the reduction approach. The trade-off curves are generated by solving a series of optimal control problems. The results are based on analyzing a representative set of flights between twelve major city-pairs in the

United States. A major contribution of the paper is the study of the sensitivity of fuel cost versus surface temperature reduction curves due to limitations in the modeling of contrail formation, radiative forcing associated with contrails and energy balance models. The policy horizon, amount of time considered to implement change, plays an important role due to the variation in the lifetime of different emissions and contrails. An important conclusion from the study is that contrail reduction maneuvers involving altitude changes produces more fuel efficient results, measured as decrease in surface temperature change for unit amount of fuel, than just horizontal maneuvers. A 2-3% additional fuel usage reduces the surface temperature change to its lowest value. Any reduction in contrails beyond this point is negated by the increase in CO₂ emissions. The results suggest that to limit the amount of excess fuel usage while minimizing the environmental impact of aviation operations, it is cost-beneficial to limit contrail reduction maneuvers to days with medium or high amount of contrail formation. These characteristics seem to be true even in the presence of various uncertainties.

The paper is organized as follows: Section 2 formulates the problem and describes the simulation and optimization methods to generate trade-off curves between changes to the Earth's surface temperature and fuel consumption. The various uncertainties affecting the problem are described in Section 3. Section 4 presents results on the sensitivity of the contrail reduction strategies due to uncertainties in the models. Summary and conclusions are provided in Section 5.

2 Approach

The technical approach used in this paper is illustrated in Figure 1. The method relies on the simulation of national level air traffic scenarios. Aircraft performance models and actual weather data are used to compute various emissions. Contrails and radiative forcing of different types of emissions are modeled using recent advances in climate science. The simulation and optimization of aircraft flights based on airspace

UNCERTAINTY QUANTIFICATION IN THE DEVELOPMENT OF AVIATION OPERATIONS TO REDUCE AVIATION EMISSIONS AND CONTRAILS

capacity, efficiency and environmental impact is a unique feature of the approach. However, results presented in this paper do not constrain

the time (decision-making horizon) when the impact is estimated. These variations make it necessary to develop a common yardstick to

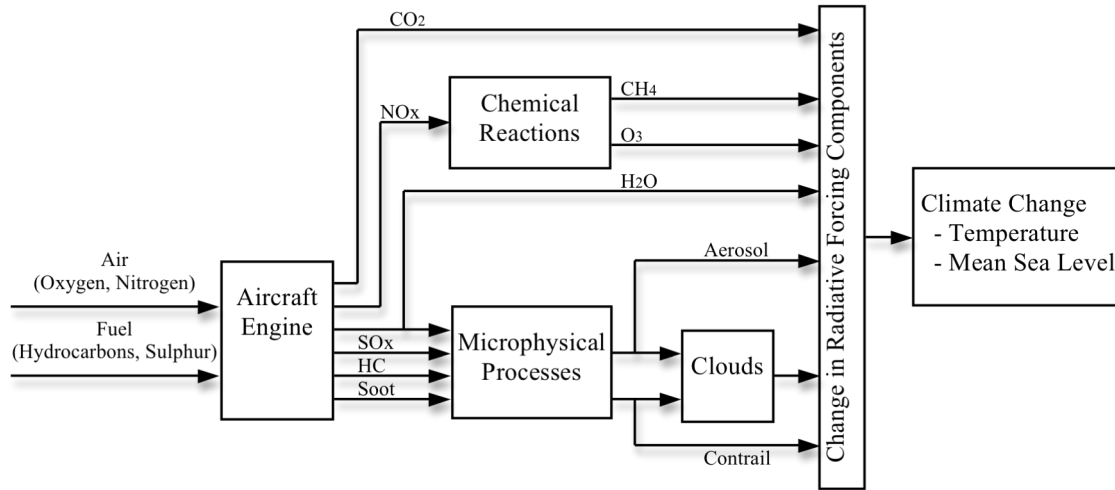


Fig 1. FACET interaction with optimization, emission and contrail models.

airspace capacity. The details about the airspace simulation and aircraft trajectory optimization algorithms are described in [6,7].

Aviation emissions and contrails have very different characteristics and influence the climate either directly or by decomposition into other chemical compounds. CO₂ is the most pervasive of all anthropogenic emissions. The impact of the introduction of additional amount of CO₂ on climate is better understood than the impact of all other greenhouse gases and contrails. In the development of climate metrics, the impact of other emissions is normalized with respect to the impact of CO₂. The atmosphere quickly absorbs additional CO₂ and the CO₂ radiative forcing is due to the globally distributed energy resulting from the uniform increase in CO₂ concentration. Contrails occur at different regions of the earth and add non-uniform sources of energy to the atmosphere. The latest estimates indicate that contrails caused by aircraft may be causing more climate warming today than all the residual CO₂ emitted by aircraft [4]. The lifetime associated with different emissions and contrails varies from a few hours to several hundred years. The impact of certain gases depends both on the amount of emission and the location of the emission. The climate impact is also significantly affected by

measure the impact of various gases. The difference between different aviation technologies or operational procedures to reduce the impact of aviation on climate can be measured in terms of the differences in near surface temperature changes between the current background scenario and the background scenario modified by new technology or operations. Several climate metrics have been developed to assess the impact of the aviation emissions and develop strategies to limit their impact on the environment. The potential impacts to the climate for the U.S. domestic flights are assessed in terms of mean surface temperature change, referred to as Absolute Global Temperature Potential (AGTP) [8], due to aircraft emissions and persistent contrails formation. The analysis presented in this paper concentrates on the climate impacts of CO₂ emissions and contrails. However, the impact of other emissions can be included in the analysis in a similar manner. The optimal trajectory algorithm is applied to calculate an aircraft trajectory in the presence of winds that minimizes fuel burn and avoids regions of airspace that facilitate persistent contrails formation. Flights between 12 major city-pairs were selected to perform the analysis. The same

city-pairs were used by the Federal Aviation Administration to assess the impact of implementation of Reduced Vertical Separation Minima (RVSM) on aircraft-related fuel burn and emissions. This study adapts the standard in RVSM and assumes that the cruising altitudes

consumption, with the associated additional CO₂ emissions, needed to reduce travel through contrail regions by different amounts using 2D and 3D approaches. The 3D approach results in a larger reduction in the amount of contrails formed for the same amount of extra fuel above

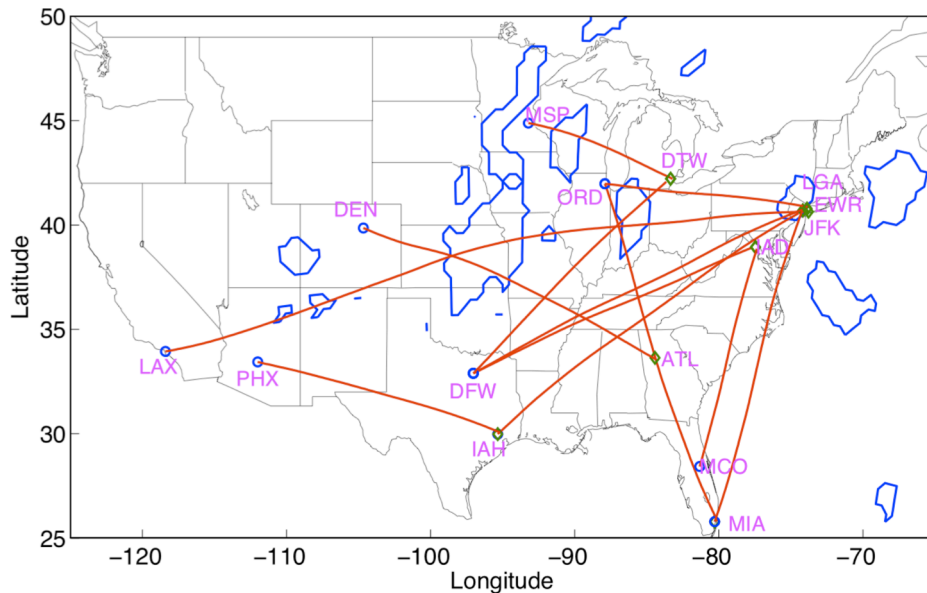


Fig 2. The wind-optimal trajectories for the eastbound flights for 12 city pairs at 37,000 feet, 6 a.m. EDT on May 24, 2007.

are between 29,000 and 41,000 feet based on current flight plans. Eastbound aircraft fly odd thousands of feet while westbound traffic fly even thousands of feet.

Figure 2 shows the wind-optimal trajectories for the eastbound flights at 37,000 feet at 6 a.m. EDT on May 24, 2007. Blue polygons depict the areas favorable to persistent contrails formation. The trajectory computations are done using traffic and atmospheric data in the continental United States for May 4, May 24, and May 27 in 2007. The data for wind speed and direction are obtained from Rapid Update Cycle (RUC). For a specific scenario involving traffic operations and atmospheric conditions corresponding to May 27, 2007, a minimum fuel (equivalent to minimum CO₂ emissions) strategy results in 493 minutes travel through contrail regions [9]. The amount of contrail formation can be reduced either by flying around the potential contrail regions at the same cruise altitude (2D approach) or by changing the cruise altitude and going around the potential contrail regions (3D approach). Figure 3 shows the amount of additional fuel

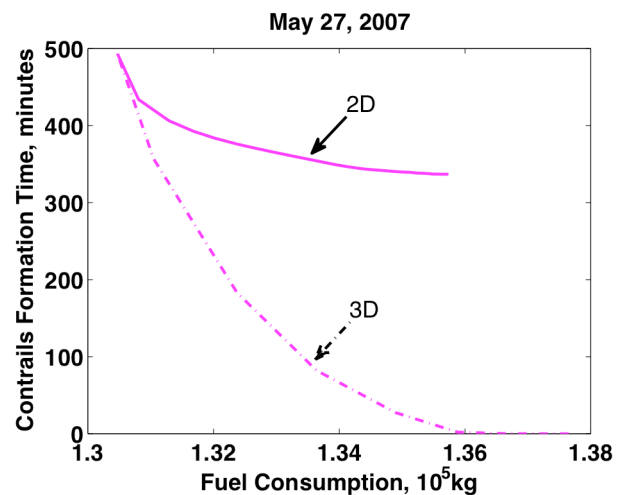


Fig 3. Trade-off curves between fuel consumption and contrail avoidance.

the baseline.

The amount of additional fuel consumed in flying a contrail reduction route instead of flying a wind optimal route represents increased cost to the airlines as well as a negative impact on the environment due to the resulting excess CO₂ emissions. Each additional kg of fuel produces approximately 3.15kg of CO₂.

UNCERTAINTY QUANTIFICATION IN THE DEVELOPMENT OF AVIATION OPERATIONS TO REDUCE AVIATION EMISSIONS AND CONTRAILS

Assuming a contrail cloud of finite width and a maximum contrail age of 6 to 24 hours [10], the contrail formation time in minutes can be converted into contrail formation in km depending on the aircraft speed. The use of AGTP provides a way to express the combined environmental cost of CO₂ emissions and contrails as a function of the fuel cost. Assuming, initially, that the radiative forcing due to contrails is independent of the location of the contrails, the difference in the near surface temperature between wind-optimal (fuel efficient) operations and contrail reduction operations can be approximated as

$$\Delta T = \Delta T_{CO_2} + \Delta T_{Con},$$

where ΔT_{CO_2} is the contribution to AGTP from CO₂ emissions and is equal to α times additional CO₂ emissions in kg, ΔT_{Con} is the contribution to AGTP from contrails and is equal to β times contrail formation in km. The values of α and β depend on the linear models for radiative forcing, the specific forcing due to CO₂, energy forcing due to contrails, energy balance model and the duration of the climate effect horizon [9]. The units for ΔT , α and β are degrees K, K/kg and K/km.

The CO₂ emissions produced by the aircraft are gradually absorbed by the atmosphere and the radiative forcing for CO₂ emissions is made of a steady state component and three exponentially decaying components with a specific forcing, $A^{CO_2} = 1.82 \times 10^{-15} \text{ Wm}^{-2}/\text{kg}$ of CO₂, a value taken from past studies [11]. The radiative forcing associated with contrails can be expressed similarly. However, an alternative way of expressing the impact of contrails on climate, Energy Forcing (EF)[10], is more useful in describing the net energy flux change due to a single flight over the lifetime of the contrails. Estimates of EF given the RF forcing due to contrails are described in [10]. The EF is expressed as joules/km of contrails. Table 1 shows the values of α and β for planning intervals of 25, 50 and 100 years. Estimates for the values for α and β and their dependency on the various uncertainties in climate and emission modeling are described in the next section.

Looking at a horizon of 50 years and a nominal value of EF=100GJ, a kg of fuel results in a temperature change of $1.82 \times 10^{-15} \text{ K}$ and a km of contrails results in a temperature change of $6.98 \times 10^{-15} \text{ K}$. Using nominal values for α and β , the data in Figure 3 is represented in Figure 4 as a trade-off between fuel cost and environmental impact of rerouting expressed as changes to the Earth's surface temperature.

Table 1. Absolute global temperature potential values for CO₂ emission and contrails.

Horizon (years)	$\alpha =$ Pulse $AGTP^{CO_2}(H)$ (K/kg of CO ₂)	$\beta =$ Pulse $AGTP^{Contrails}(H)$ (K/km of contrails)
H=25	$0.3686A^{CO_2}$	$2.994 \times 10^{-25} EF$
H=50	$0.3176A^{CO_2}$	$6.978 \times 10^{-26} EF$
H=100	$0.2788A^{CO_2}$	$5.105 \times 10^{-26} EF$

Figure 4 shows AGTP, for H=25 years and EF=100GJ, as a function of the amount of fuel used for different two- and three-dimensional contrail reduction strategies. The contribution to AGTP from CO₂ emissions increases linearly with fuel consumption and the contribution due to contrails is nonlinear. The cumulative AGTP curve decreases initially with reduction in contribution from contrails and is eventually offset by the increase in contribution from CO₂ emissions. The curves show that even if the cost of fuel is not taken into consideration, under certain conditions, reducing contrails beyond a certain level may neither be economical nor good environmental policy.

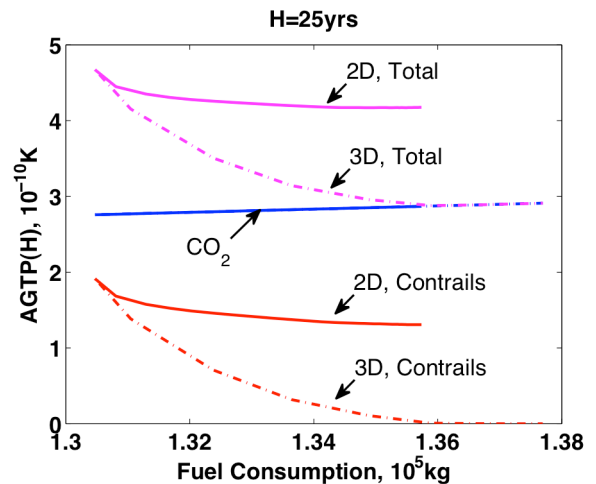


Fig 4. Trade-off curves in terms of AGTP.

3 Uncertainty Quantification

The trade-off curves in Figure 4 between fuel cost and changes to the Earth's surface temperature depend on several parameters. The uncertainties associated with each parameter can be described variously either by distributions, intervals or expert opinion. Uncertainties associated with aircraft parameters can be described by probability distributions, whereas climate impacts of emission are available as intervals. Uncertainty associated with the cost of a unit of CO₂ emissions is based on expert opinion, and those associated with the targets for emissions are still in flux. Error bounds on the performance of the system can be computed by considering several different uncertainties such as daily variations, aircraft weight uncertainties, size of the contrail regions based on relative humidity, coverage of a single aircraft track, effect of wind variations and radiative forcing associated with contrails. This section captures the uncertainty associated with some of these parameters.

3.1 Uncertainty About the Amount of Aviation Byproduct

This paper considers only the two major byproducts of aviation, CO₂ emissions and contrails in the following analysis. The effect of other greenhouse gases can be included in the analysis similarly. Compared to contrails, there are small errors in the estimate of CO₂ emitted by an aircraft. The amount of CO₂ emitted is directly proportional to fuel burn and varies with aircraft attitude, altitude and cruise speed. The emission estimates tend to be less accurate during climb and descent.

Line-shaped contrails or linear contrails (LC) form behind aircraft and persist under certain atmospheric conditions. LC that form behind aircraft can spread into irregularly shaped cirrus-like clouds in favorable atmospheric conditions indistinguishable from natural cirrus. LC together with their spread is referred to as contrail cirrus (CC). The cirrus properties are affected by aircraft soot emissions. The term Aviation Induced Cloudiness (AIC) includes CC and changes in cirrus properties or formation due to aircraft

soot emissions. The formations of persistent linear contrails depend on atmospheric parameters and there are errors associated with estimates of relative humidity with respect to Water (RHW) in numerical weather models. RUC underestimates upper tropospheric humidity. This is corrected in some models by predicting the onset of persistence contrails at a lower Relative humidity with respect to ice (RHI) than 100% (e.g., 85%). Although, a lower value of RHI increases the area of contrail coverage, it does not affect the overall pattern of contrail coverage in the US. A preliminary analysis of the effect of relative humidity errors on the trade-off curves is presented in [7].

Atmospheric parameters, temperature and relative humidity, vary both on a diurnal and seasonal basis. These parameters affect the location of regions favorable to persistent contrail formation. As an example, the daily variation in the contrail formation time for wind optimal flights for the special set of 12 city-pair routes during the month of May 2007 is shown in Figure 5. To reduce the amount of computations, three days are selected from the month of May 2007 representing a day with high contrails (HCD), a day with medium amount of contrails (MCD) and a day with low amount of contrails (LCD). These three days, HCD, MCD and LCD, will be used to represent variations in atmospheric conditions. Figure 6 shows how the trade-off between contrail formation time and additional fuel consumption

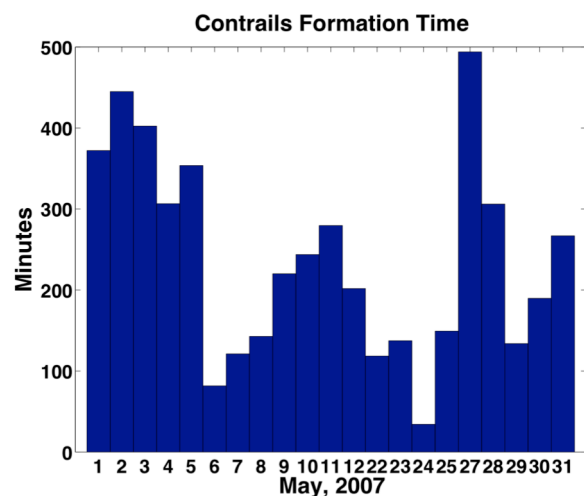


Fig 5. Contrail formation during May 2007.

varies for the same traffic scenario for atmospheric conditions corresponding to low (May 24), medium (May 4) and high (May 27) contrail formation days. Full lines and dotted lines show the reduction in contrails using 2D approach and 3D approach respectively.

3.2 Radiative Forcing (RF)

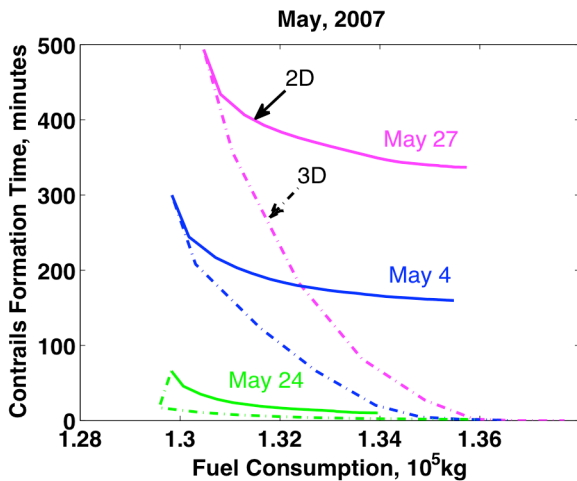


Fig 6. Trade-off between contrail formation time and additional fuel consumption on different days.

The RF resulting from all aviation sources in 2005 was estimated to be 55 mW/m^2 (about 3.5% of all anthropogenic RF) and projected to increase by a factor of three to four by 2050 [12]. The value varied from $130\text{-}560 \text{ mW/m}^2$ for a full range of scenarios. The IPCC estimated that the RF from CO_2 due to aviation in the range $13\text{-}26 \text{ mW/m}^2$ with a mean value of 18 mW/m^2 [13]. More recently, it has been estimated to be around 30 mW/m^2 [12].

It is essential to develop and validate models to predict the physical and radiative properties of contrails from the RUC and other numerical weather models. The persistence contrail formation for the continental United States correlates well with the 4-km imagery from Geostationary Operational Environmental Satellite (GOES-8) [14-15]. The RF associated with contrails depends on the area, optical thickness and the lifetime of the contrails. The first estimates of RF for the year 1992, 20 mW/m^2 , were based on [16]. The IPCC revised the estimates, based on a better understanding of the optical depth of contrails, to 10 mW/m^2 with an uncertainty range of $(6,15) \text{ mW/m}^2$ [17]. The

IPCC acknowledged the effect of CC to be large. However, it did not estimate the RF due to CC because of the large uncertainty associated with it. It is argued that a large fraction of CC is optically very thin and thus can neither be detected by a satellite nor visible from ground. Recent research [18], using a contrail-cirrus module global climate model ECHAM4, has indicated that the RF due to contrail cirrus is about 9 times larger than that from LC. This makes CC with a RF of 31 mW/m^2 as the single biggest source of aviation induced RF [18].

The estimates of EF are made by assuming a mean value for RF resulting from contrails due to the entire distance flown by the aviation fleet during a year. Assuming a $\text{RF} = 10 \text{ mW/m}^2$ and a total distance flown by the entire civil aviation fleet annually as $3.3 \times 10^{10} \text{ km}$, the RF due to LC per km of flight = $3.0 \times 10^{-10} \text{ mW/m}^2/\text{km}$ [10]. However, 1250km flight observations with a single aircraft operating in conditions favorable for PC appears to exert a contrail-induced RF some 5000 times greater ($1.6 \times 10^{-6} \text{ mW/m}^2/\text{km}$) than recent estimates of the average LC RF from the entire civil aviation fleet [19].

3.3 Energy Balance Models

The computation of AGTP assumes simple linear climate/energy balance models to compute the changes in the surface temperature due to the changes in the RF of greenhouse gases and contrails. The change to the Earth's surface temperature, an end-point metric, is expressed as the change at the end of a planning interval. CO_2 has a lifetime extending over hundreds of years, while the lifetime of contrails varies over a few hours. Due to the different lifetimes associated with CO_2 emissions and contrails, their contribution to the temperature change is strongly influenced by the time horizon (H). The planning interval is influenced by policy-making and time horizons ranging from 25 to 100 years are considered in this paper.


The efficacy factor is used to differentiate the way radiative forcing from CO_2 and contrails affect the climate. It is defined as the

ratio between the global temperature increase for a local energy input relative to that for a CO₂-equivalent globally distributed energy input [11]. The efficacy factor for annual mean contrail cover is estimated to be about 0.6 [20]. The efficacy factor is treated as a parameter in this paper and its value is in the range (0.6 - 1.0).


4 Effect of Parameter Uncertainty

This section describes results based on several scenarios using discrete values in the range of different important parameters affecting the impact of aviation on climate. Figure 7.a shows the variation of AGTP with fuel consumption for three different days in May 2007. The results are shown for H=25 years, EF=100GJ and efficacy=1.0. The changes to AGTP using route only optimization (2D) are indicated by solid lines while changes involving additional altitude changes (3D) are shown by dash-dotted lines. For all days, contrail reduction maneuvers involving altitude changes produce more fuel efficient results, measured as decrease in AGTP per unit amount of fuel, than just horizontal maneuvers. On May 27, an additional 4000 kg (about 2-3% additional fuel usage) reduces AGTP to its lowest value with no further reduction possible. Any reduction in contrails beyond this point is negated by the increase in CO₂ emissions. Again, the same trend holds on all days. However, the reduction in AGTP due to contrail reduction maneuvers is minimal on days with low amounts of contrail formation. These results suggest that to limit the amount of excess fuel usage while minimizing the environmental impact of aviation operations, it is cost-beneficial to do no contrail reduction maneuvers on days with low amounts of contrail formation. These are significant observations for the development of operational strategies to reduce the impact of aviation on climate. The next paragraph examines if these results are valid in the presence of various uncertainties.


A major source of uncertainty is the RF values associated with contrails. As discussed earlier, these values range from 10 to 90 mW/m² depending on various assumptions about contrail formation and its spreading. Three

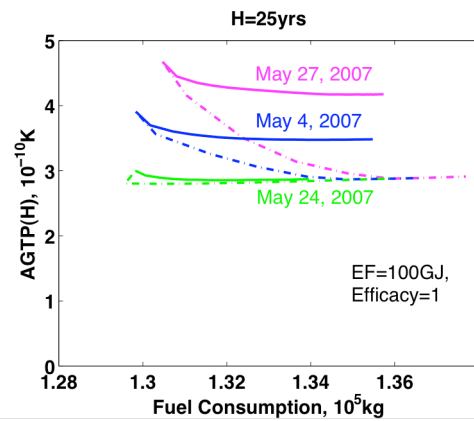


(a) AGTP variation for 3 days in May, 2007

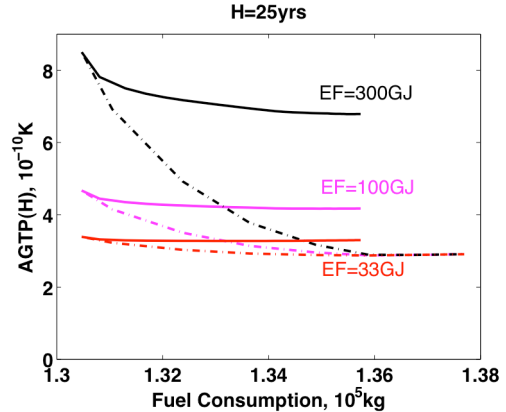

(b) Effects of Contrails EF on May 27, 2007

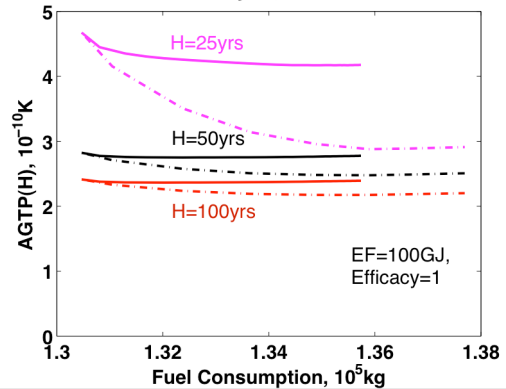

(c) AGTP for three different time horizons

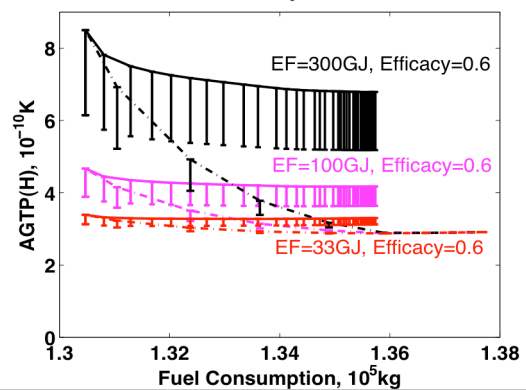

(d) Efficacy factors between 0.6 and 1.0

Fig 7. Variation of AGTP with fuel consumption for three different days in May 2007

different values, 10, 30 and 90 mW/m², are used in this study. The three RF values for contrails translate into equivalent EF values, 33, 100 and 300GJ. Figure 7.b shows the influence of the variation in RF estimates of contrails for three different values of EF on May 27. Although, higher values of EF result in net bigger reductions of AGTP, the reductions level off more or less at about the same amount of extra fuel consumption.

Being an end point metric, the value of AGTP is heavily influenced by the choice of policy horizon. For May 27 with EF=100GJ and efficacy=1.0, Figure 7.c shows the same trade-off curves for three different values of H=25, 50 and 100 years. The small lifetime of contrails compared to the lifetime of CO₂ reduces the contrail contribution to AGTP significantly as H increases, with approximately a six-fold reduction from 25 to 100 years. The behavior of AGTP with increasing contrail reduction maneuvers tapers off at approximately the same amount of extra fuel usage as in the earlier cases.

The AGTP curves for contrail reduction using horizontal maneuvers for different values of EF described in Figure 7.b are recomputed for various values of efficacy. The effect of varying efficacy in the range (0.6-1.0) is shown in Figure 7.d. Lower values of efficacy result in lower values of AGTP under all conditions. However, the overall trend in the relationship between fuel usage and the impact of contrail reducing maneuvers remains unchanged.

5 Summary and Conclusions

This paper brings together the modeling of complex aeronautical system behavior and interactions with climate science involving widely varying time (minutes to years) and spatial scales (local to world-wide). The main contributions of the paper are: (a) the integration of simplified models, real weather and traffic data, multiple scenarios and error bounds in a process that can be used to guide operational solutions to reduce the impact of aviation on climate, (b) innovative use of a contrail frequency index, a measure of the potential for a specific set of traffic and atmospheric

conditions to produce persistent contrails, to reduce the number of computations and (c) the quantification of variation in the fuel cost versus surface temperature reduction curves due to limitations in the modeling of contrail formation, radiative forcing associated with contrails and energy balance models. An important conclusion from the study is that contrail reduction maneuvers involving altitude changes produces more fuel efficient results, measured as decrease in surface temperature change for unit amount of fuel, than just horizontal maneuvers. A 2-3% additional fuel usage reduces the surface temperature change to its lowest value. Any reduction in contrails beyond this point is negated by the increase in CO₂ emissions. The results suggest that to limit the amount of excess fuel usage while minimizing the environmental impact of aviation operations, it is cost-beneficial to limit contrail reduction maneuvers to days with medium or high amount of contrail formation. These characteristics seem to be true even in the presence of various uncertainties. These conclusions are based on limited traffic scenarios and assume that the effect of contrails is independent of their location. Using a larger number of traffic scenarios and using more detailed contrail models can remove these limitations. Such analysis and quantification results can provide inputs to the FAA national policy development tools such as the Aviation Environmental Design Tool and the Aviation Environmental Portfolio Management Tool (APMT) [21].

References

- [1] Aviation and the global atmosphere, intergovernmental panel on climate change. Cambridge University Press, Cambridge, UK, 1999.
- [2] NASA workshop on the impacts of aviation on climate change. June 7-9, 2006, Boston, MA.
- [3] Duda D, Minnis P, Costulis P and Palikonda R. CONUS contrail frequency estimated from RUC and flight track data. *European Conference on Aviation, Atmosphere, and Climate*, Friedrichshafen at Lake Constance, Germany, June-July, 2003.
- [4] <http://www.nature.com/nclimate/journal/v1/n1/full/nclimate1078.html>.

- [5] Grewe, V., and Stenke, A., "AirClim: an efficient tool for climate evaluation of aircraft technology," *Atmos. Chem. Phys.*, 8, 4621–4639, 2008
- [6] Bilimoria K, Sridhar B, Chatterji G, Sheth K and Grabbe S. FACET: future ATM concepts evaluation tool. *Air Traffic Control Quarterly*, Vol. 9, No. 1, 2001.
- [7] Sridhar, B., Chen, N. Y., Ng, H. K., and Link, F., "Design of Aircraft Trajectories based on Trade-offs between Emission Sources," 9th USA/Europe Air Traffic Management R&D Seminar, Berlin, Germany, June 2011.
- [8] Fuglestvedt, J. S., Shine, K. P., Berntsen, T., Cook, J., Lee, D. S., Stenke, A., Skeie, R. B., Veldes, G. J. M., and Waitz, I. A., "Transport impacts on Atmosphere and Climate: Metrics," *Atmosphere Environment*, Vol. 44, No. 37, 2010, pp. 4648-4677, doi:10.1016/j.atmosenv.2009.04.044.
- [9] Sridhar, B., Ng, H., and Chen, N., "Integration of Linear Dynamic Emission and Climate Models with Air Traffic Simulations," AIAA Guidance, Navigation and Control Conference, Minneapolis, MN, 2012.
- [10] Schumann, U., Graf, K., and Mannstein, H., "Potential to Reduce the Climate Impact of Aviation by Flight Level Changes," 3rd AIAA Atmosphere Space Environments Conference, AIAA Paper 2011-3376, Honolulu, Hawaii, 2011.
- [11] Forster, P., Ramaswamy, V., Artaxo, P., Berntsen, T., Betts, R., Fahey, D.W., Haywood, J., Lean, J., Lowe, D.C., Myhre, G., Nganga, J., Prinn, R., Raga, G., Schulz, M., Van Dorland, R., 2007a. Changes in atmospheric constituents and in radiative forcing. In: Solomon, S., et al. (Eds.), *Climate Change 2007: the Physical Science Basis. Contribution of Working Group I to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change (IPCC)*. Cambridge University Press, Cambridge.
- [12] Lee, D.S., et al., Transport impacts on atmosphere and climate: Aviation, *Journal of Atmospheric Environment*, 2009.
- [13] IPCC. *Aviation and the Global Atmosphere*. Cambridge, UK: Cambridge Univ. Press, 1999.
- [14] Minnis, P., et al., Contrail Coverage and Radiative Forcing Over the USA derived from Satellite Data, *Atmospheric Effects of Aviation Conference*, Snowmass, CO, June 2000.
- [15] Bedka, S.T., et al., Contrail Detection and Microphysical Properties Derived Using Infrared Satellite Data From MODIS, 92nd American Meteorological Society Annual Meeting, New Orleans, LA, January, 2012.
- [16] Minnis, P., Schumann, U., Doelling, D. R., Gierens, K., and Fahey, D. W. "Global distribution of contrail radiative forcing," *Geophys. Res. Lett.* Vol. 26, No. 13, 1999, pp. 1853 - 1856
- [17] Sausen, R., Isaksen, I., Hauglustaine, D., Grewe, V., Lee, D. S., Myhre, G., Köhler, M. O., Pitari, G., Schumann, U., Stordal, F., and Zerefos, C. "Aviation radiative forcing in 2000: An update on IPCC (1999)," *Meteorol. Z.* Vol. 14, 2005, pp. 555 - 561, 10.1127/0941-2948/2005/0049.
- [18] Burkhardt, U., and Kärcher, B. "Global radiative forcing from contrail cirrus," *Nature Clim. Change* Vol. 1, 2011, pp. 54-58, DOI: 10.1038/NCLIMATE1068.
- [19] Haywood, J. M. et al. A case study of the radiative forcing of persistent contrails evolving into contrail-induced cirrus. *J. Geophys. Res.* 114, D24201 (2009).
- [20] Ponater, M., "Distinctive Efficacies of the components contributing to total aviation climate impact," *Proceedings of the 2nd International Conference on Transport, Atmosphere and Climate (TAC-2)*. 22-25 June 2009, DLR-Forschungsbericht 2010-10, Köln-Porz, Germany, ISSN 1434-8454. Aachen, Germany, and Maastricht, The Netherlands, 2009, pp. 227- 232.
- [21] http://www.faa.gov/about/office_org/headquarters_offices/apl/research/models/apmt/

6 Contact Author Email Address

Banavar.Sridhar@nasa.gov

Copyright Statement

The authors confirm that they, and/or their company or organization, hold copyright on all of the original material included in this paper. The authors also confirm that they have obtained permission, from the copyright holder of any third party material included in this paper, to publish it as part of their paper. The authors confirm that they give permission, or have obtained permission from the copyright holder of this paper, for the publication and distribution of this paper as part of the ICAS2010 proceedings or as individual off-prints from the proceedings.